

Single Pole Pushbutton Thermal Circuit Breaker



35-2104

ROHS Compliant

4 Amps


UPC: 010151547514

125-250VAC, 32VDC

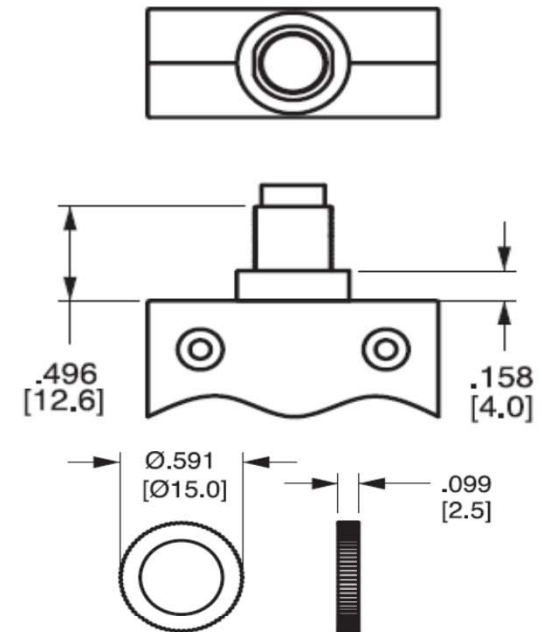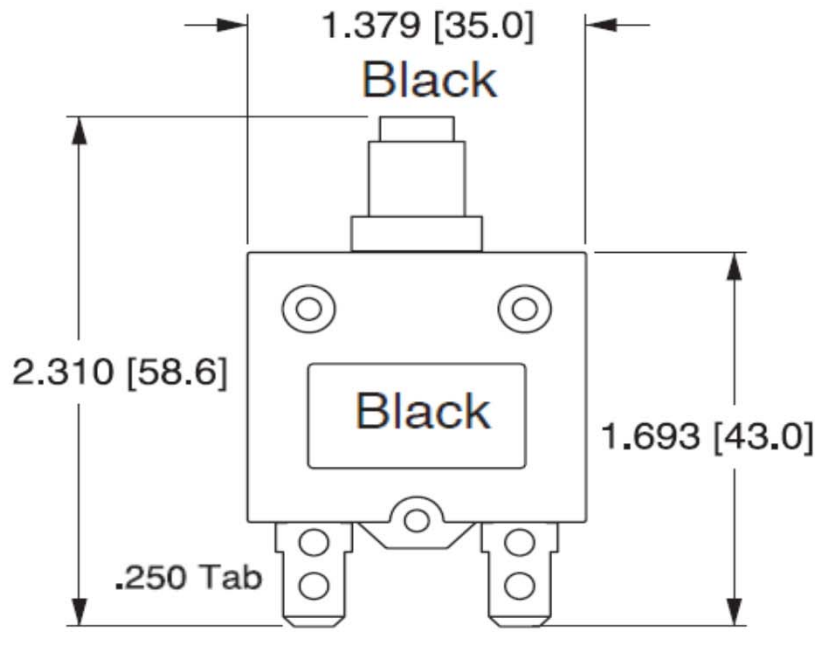

M11 mounting hole

Terminals are .0315 [.8] thickness for ratings < 35 Amps

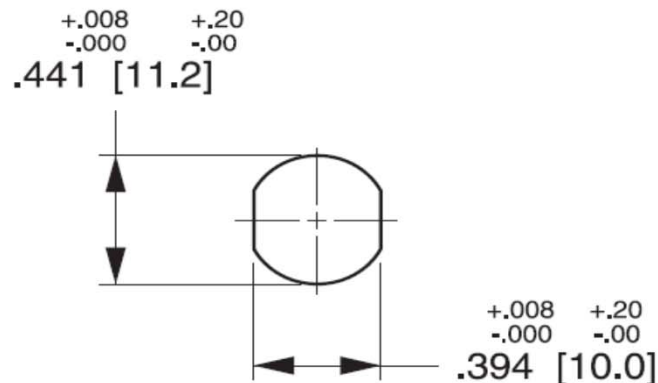

Dielectric Strength:

2500 VAC/1 minute

Interrupting capacity:

2500 amps @ 32 VDC

Insulation Resistance:

100M ohms

Operating Temperature:

-10°C to 60°C


Voltage drop:

< 0.25 V

Indicator Plate

Silver Printing on Black

“Suppl. Prot. press to reset”.

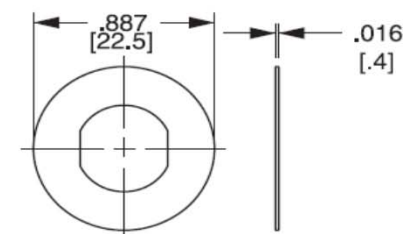

Country of Origin: Taiwan
HTS USA: 8536.50.9065

