

# Single Pole Pushbutton Thermal Circuit Breaker


**35-2140**

**ROHS Compliant**

40 Amps


UPC: 010151432490

125-250VAC, 32VDC

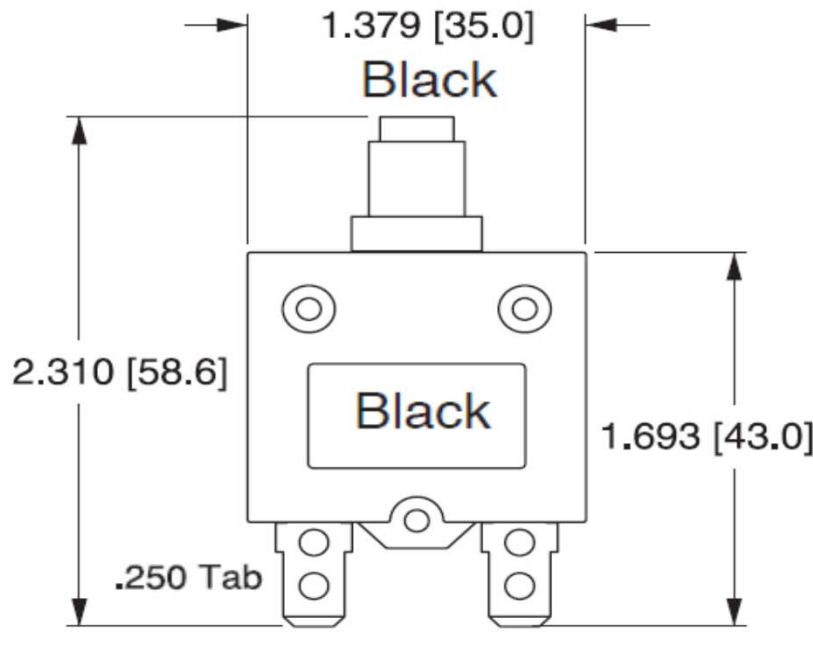

**M11 mounting hole**

Terminals are .0315 [.8] thickness for ratings < 35 Amps

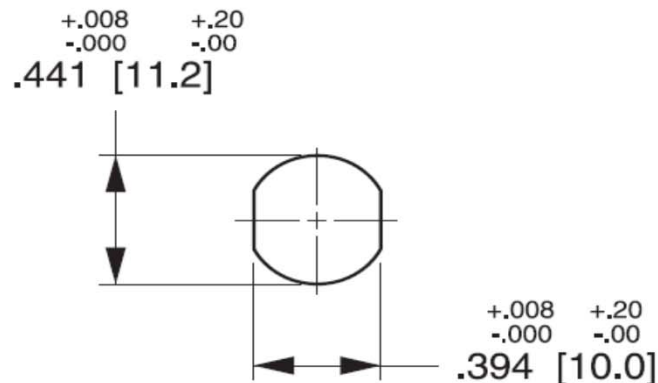

**Dielectric Strength:**

2500 VAC/1 minute

**Interrupting capacity:**

2500 amps @ 32 VDC

**Insulation Resistance:**


100M ohms

**Operating Temperature:**

-10°C to 60°C

**Voltage drop:**


< 0.25 V

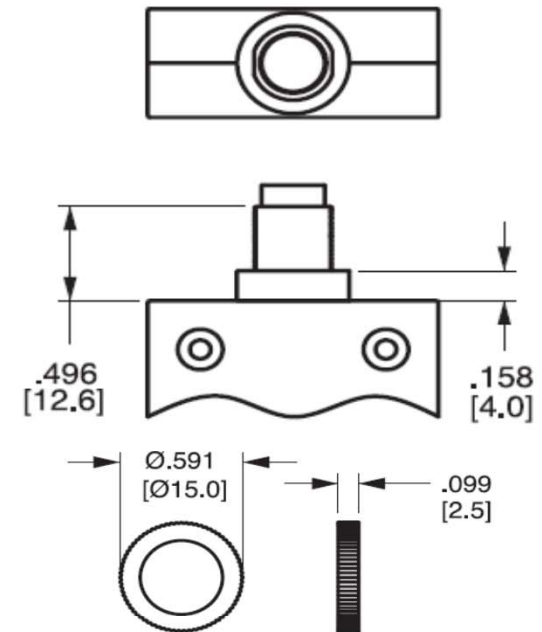

**Indicator Plate**

Silver Printing on Black

“Suppl. Prot. press to reset”.

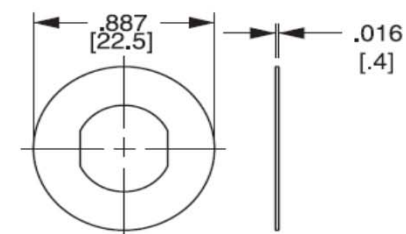

Country of Origin: Taiwan  
HTS USA: 8536.50.9065

