

DIN CONNECTORS

33-952

RoHS: CERTIFIED

Specifications:

Contact Rating: 2A 100V AC

Contact Resistance: **20M Ω Max.**

Insulation Resistance: **100M Ω Min. 500V DC**

Dielectric Withstand Voltage: 1000V RMS @ 50/60 Hz

Insertion Force: 4.0 Kg. Max.



Withdrawal Force: 1.8 Kg. Min.

Contact Life: 5000 Cycles Min.

Dielectric strength
1,000V AC/1 Minute

4 @ 210°

Inline Male CIRCULAR PLUG

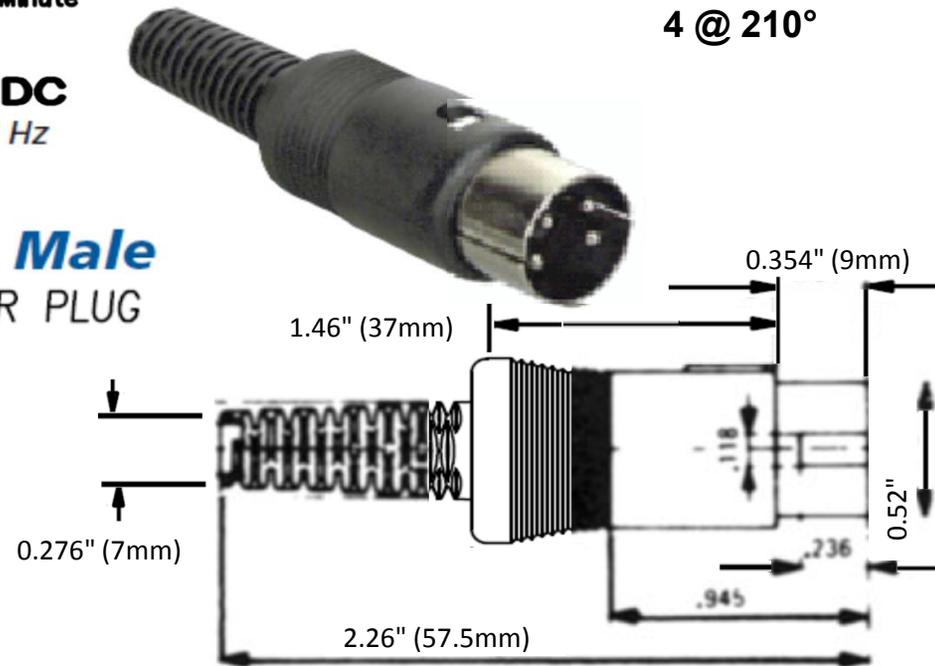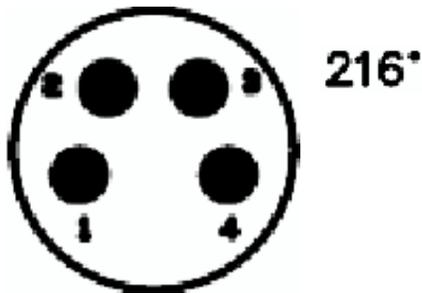

Silver plated contact pins provide better connections. All in-line models have a protective strain relief for longer life. These connectors are manufactured to DIN (Deutsch Industrie Norm) specifications.

UPC: 010151554215

HTS: 8536.69.4050

COO: TW