

# DIN CONNECTORS

33-958

RoHS: CERTIFIED

## Specifications:

Contact Rating: 2A 100V AC

Contact Resistance: **20M  $\Omega$  Max.**

Insulation Resistance: **100M  $\Omega$  Min. 500V DC**

Dielectric Withstand Voltage: 1000V RMS @ 50/60 Hz

Insertion Force: 4.0 Kg. Max.

Withdrawal Force: 1.8 Kg. Min.


Contact Life: 5000 Cycles Min.

Dielectric strength  
1,000V AC/1 Minute




8 @ 270°

## Inline Male CIRCULAR PLUG

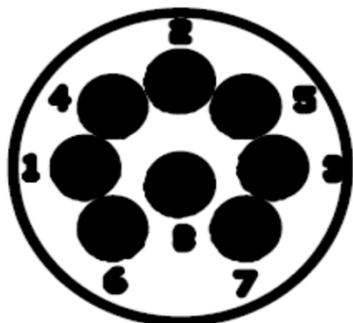

270°

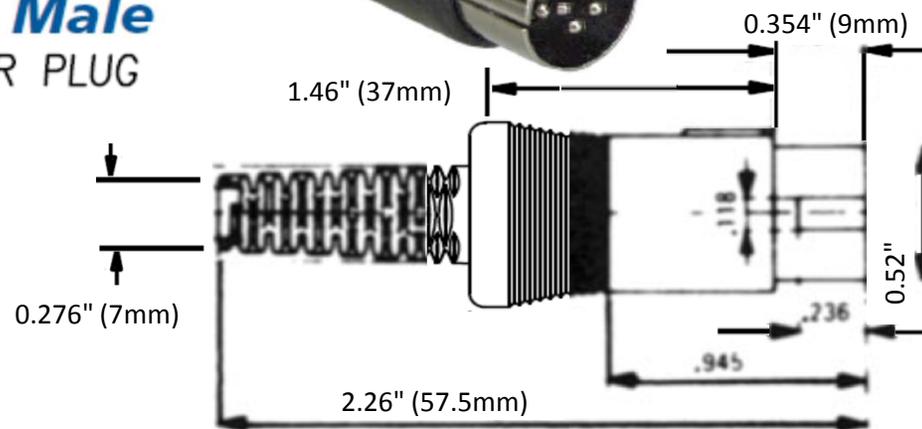

*Silver plated contact pins provide better connections. All in-line models have a protective strain relief for longer life. These connectors are manufactured to DIN (Deutsch Industrie Norm) specifications.*

UPC: 010151554277

HTS: 8536.69.4050

COO: TW