

Miniature Toggle Switch



5A 12VAC
2A 250VAC

3PDT

35-026

100-3P3-T100B1M1QE

RoHS CERTIFIED

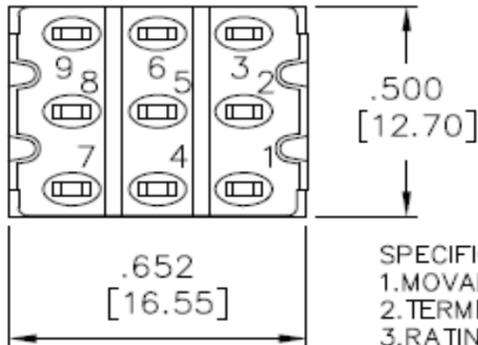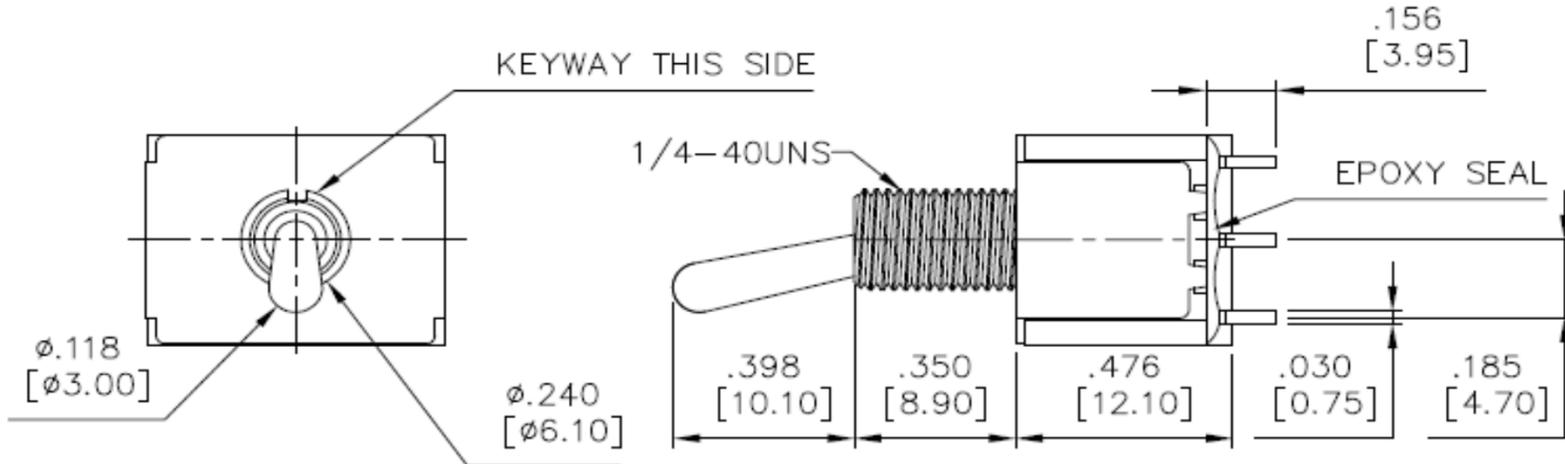

Model No.	Switching Position		
	ON	OFF	ON
3P-3	ON	OFF	ON

SPECIFICATIONS:

- 1.MOVABLE CONTACT: Copper alloy, silver plated
- 2.TERMINALS: Copper alloy, silver plated
- 3.RATING: 5Amps with resistive load @ 120VAC or 28VDC
2Amps with resistive load @ 250VAC
- 4.CONTACT RESISTANCE: 10m-ohms max. initial
- 5.INSULATION RESISTANCE: 1,000M-ohms min.
- 6.DIELECTRIC STRENGTH: 1,000V RMS @ sea level
- 7.ELECTRICAL LIFE: 50,000 make and break cycles at full load
- 8.OPERATING TEMPERATURE: -30°C to +85°C
- 9.ROHS COMPLIANCE

