

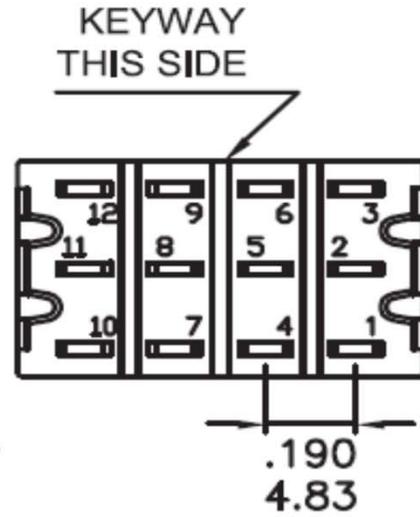


ON-OFF-ON

# Toggle Switches

4PDT


35-038

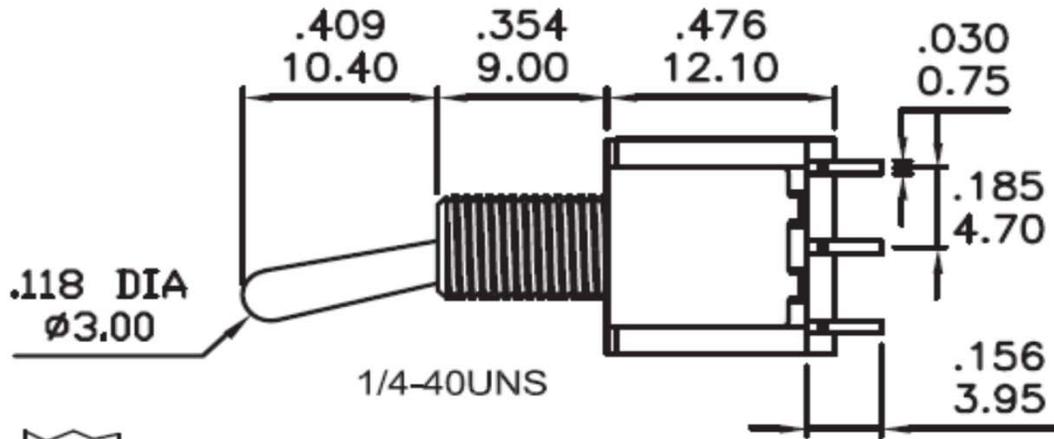


Solder Lug

5Amps @ 125VAC or 28VDC  
2Amps @ 250VAC



Silver plated



1/4 INCH BUSHING

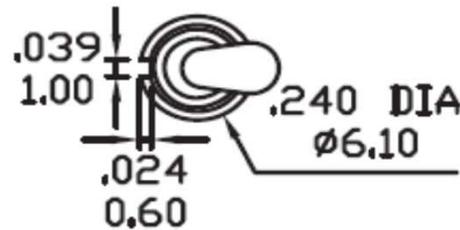

Schematic:

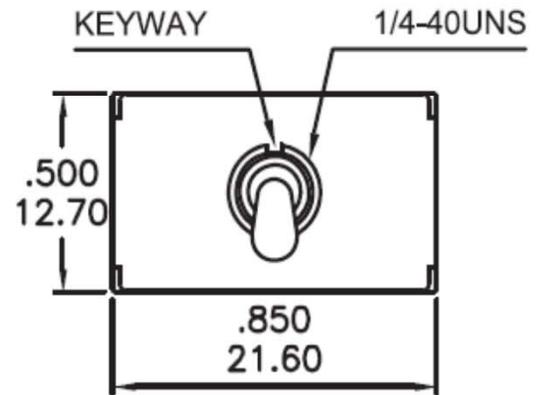

ELECTRICAL LIFE: 50,000 make-and-break cycles at full load.  
 CONTACT RESISTANCE: 10mΩmax. initial @2-4VDC  
 100mA for both silver and gold plated contacts.  
 INSULATION RESISTANCE: 1,000M Ωmin.  
 DIELECTRIC STRENGTH: 1,500V RMS @ sea level.  
 OPERATING TEMPERATURE: -30°C to +85°C

RoHS CERTIFIED

