


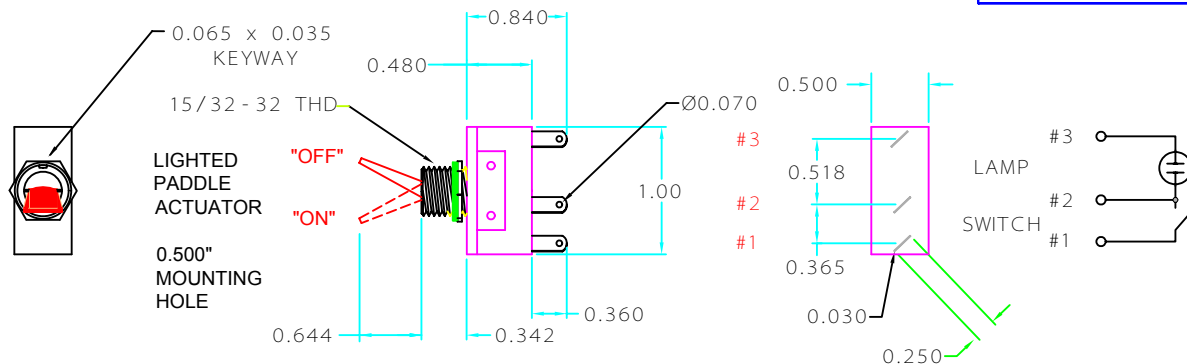

SPECIFICATIONS

POLES / THROWS:	SPST
CURRENT RATING:	16A 12Vdc
INITIAL CONTACT	
RESISTANCE:	5 MILLI-OHMS MAX.
INSULATION	
RESISTANCE:	100 MEGA-OHMS MIN.
DIELECTRIC STRENGTH:	1,500Vac MIN.
CONTACT MATERIAL:	SILVER
TERMINAL MATERIAL:	SILVER - SILVER PLATED
TERMINAL TYPE:	COMBINATION SOLDER & .250 QUICK CONNECT
LAMP:	12V, 55mA, 10,000 HR AVG LIFE

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE FOR REFERENCE
PURPOSES ONLY.

DRAWINGS ARE THE PROPERTY OF
GC ELECTRONICS. REPRODUCTION OR
DISTRIBUTION OF THIS DRAWING MUST
HAVE PRIOR WRITTEN CONSENT FROM
GC ELECTRONICS.

TOLERANCE ±0.008

GC Electronics

PART NAME TOGGLE SW, SPST, LIGHTED RED PADDLE ACTUATOR

MAT'L

DRAWN S.R.S.

11/23/08

PART NO.

CHECKED

REV.

35 - 090

SHEET 1 OF 1

SCALE NTS :

DIMENSIONS INCHES