PART NO. 35 - 092

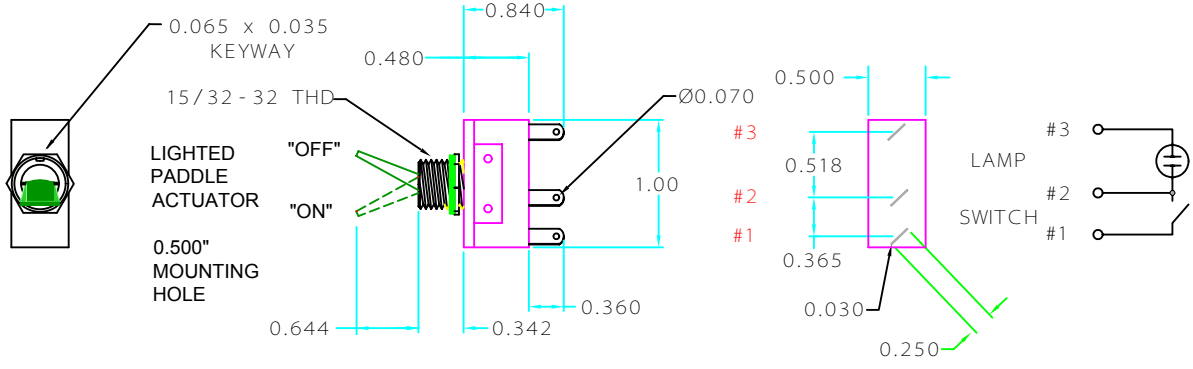

SPECIFICATIONS

POLES / THROWS:	SPST
CURRENT RATING:	16A 12Vdc
INITIAL CONTACT RESISTANCE:	5 MILLI-OHMS MAX.
INSULATION RESISTANCE:	100 MEGA-OHMS MIN.
DIELECTRIC STRENGTH:	1,500Vac MIN.
CONTACT MATERIAL:	SILVER
TERMINAL MATERIAL:	SILVER - SILVER PLATED
TERMINAL TYPE:	COMBINATION SOLDER & .250 QUICK CONNECT
LAMP:	12V, 55mA, 10,000 HR AVG LIFE

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWINGS ARE THE PROPERTY OF GC ELECTRONICS. REPRODUCTION OR DISTRIBUTION OF THIS DRAWING MUST HAVE PRIOR WRITTEN CONSENT FROM GC ELECTRONICS.

TOLERANCE	±0.003			
		NO.	CHANGE	DATE

GC Electronics

PART NAME: TOGGLE SW, SPST, LIGHTED GREEN PADDLE ACTUATOR

MAT'L

DRAWN: S.R.S. 11/23/04

CHECKED

REV.

PART NO. 35 - 092

SHEET 1 OF 1 SCALE NTS : DIMENSIONS INCHES