


35- 114

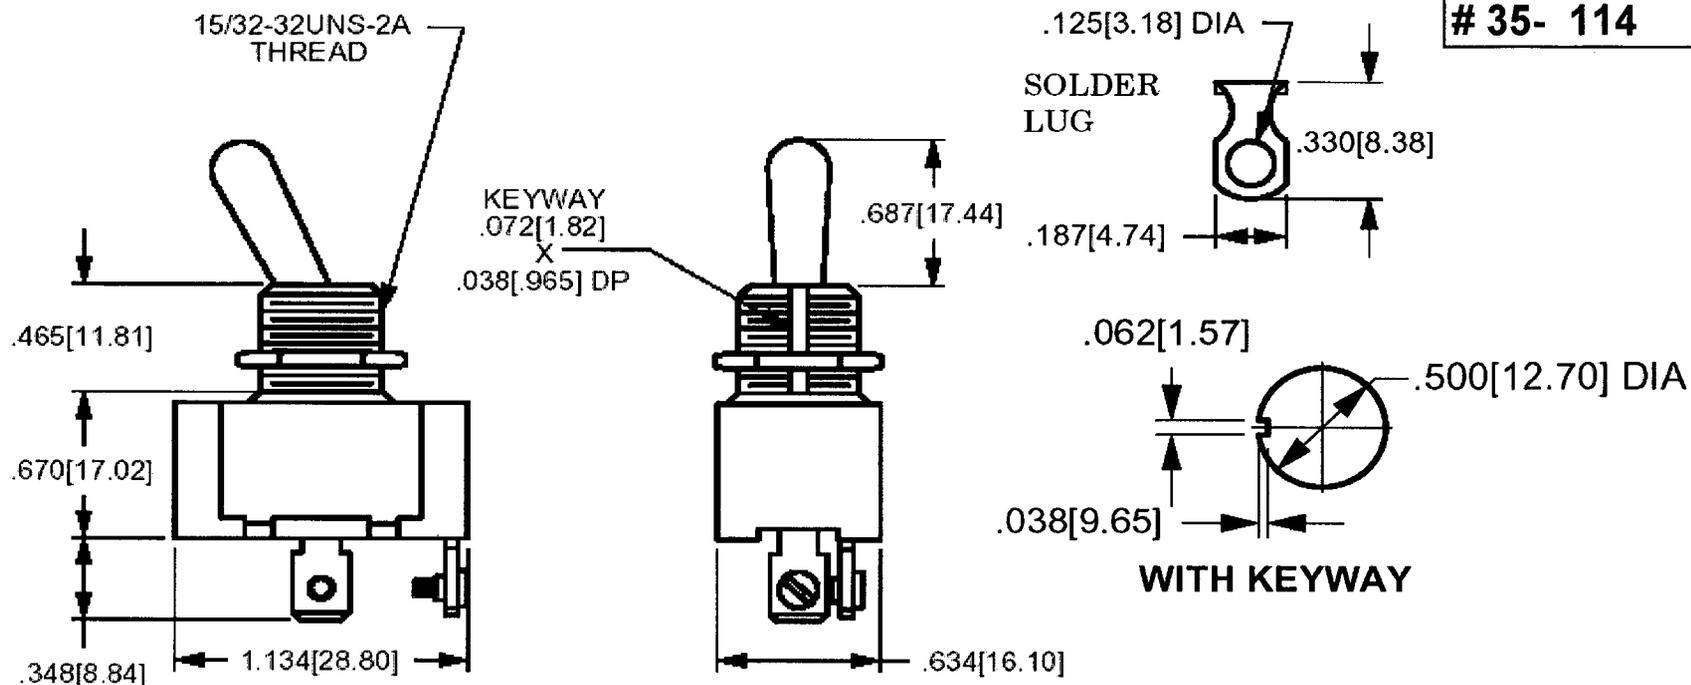

Specifications

- Certifications*: UL, CSA
- Dielectric Strength: 1,000V (minimum)
- Insulation Resistance: 100 Megohms (minimum)
- Base Material: Phenolic
- Actuator Material: Brass/Nickel Plate
- Bushing Material: Brass/Nickel Plate

SPDT
ON-NONE-ON

3A 250VAC
6A 125VAC
1/4HP 120-240VAC

