

35-1304



**UNCONTROLLED**

SPECIFICATION



Contact Rating : 10A125VAC 5A250VAC (S, W)  
 6(1)A250V~11 T85 (A, D, M, E, F)  
 5A/2~250V~(CC)  
 Initial Contact Resistance : 50 Milliohm Max.  
 Insulation Resistance : 500 Megohms Min. 500VDC.  
 Withstand Voltage : 1,000 VAC-1 Minute.  
 Life Expectancy : OVER 10,000 Cycles.  
 Operating Force : 400±200 Gram.

UL FILE NO: E105856  
 CSA FILE NO: LR 112904-6  
 VDE FILE NO: 40009019  
 CQC FILE NO: CQC03002004733


DEMKO FILE NO: 313239-01  
 NEMKO FILE NO: P05203636  
 SEMKO FILE NO: 500890  
 FI FILE NO: 21498

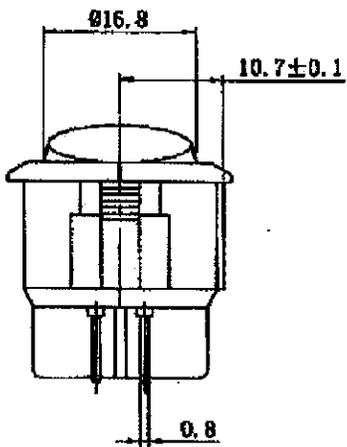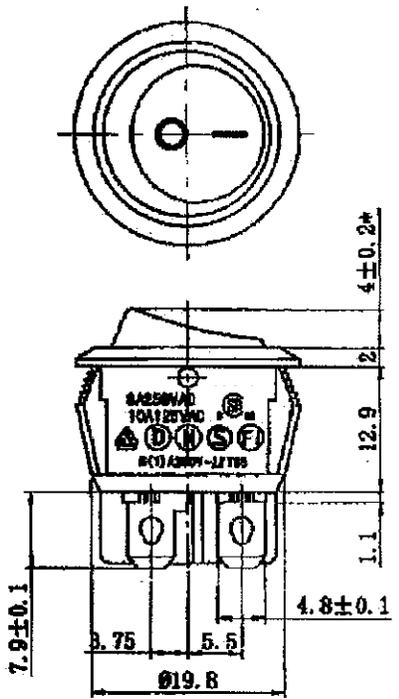

MOUNTING HOLE

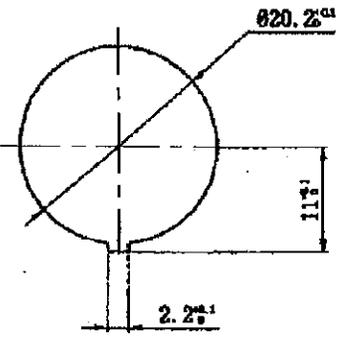

A1	4.0±0.2	A	7.9±0.1
B1	Ø22.8±0.2	B	4.8±0.1
		C	10.7±0.1

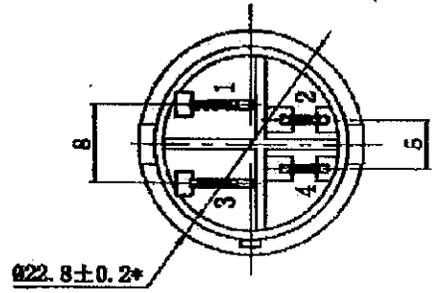

				DES:		
TOL	>0.9-6 ±0.1	DRW	F. J. R	05/05/05	TITLE	ROCKER SWITCH
	>6-30 ±0.15	DESIGN	F. J. R	05/05/05	DRG NO.	
	>30 ±0.3	CHECKED	<i>[Signature]</i>	5/30	MODEL	
	ANG ±1°	APPROVED	<i>[Signature]</i>			
SCALE	1.5:1	UNIT	mm			A1
PROJ	<i>[Symbol]</i>	TOT				2005.05.30