

Rotary Switch

Non-shorting contacts

4PDT



35-1343

RoHS CERTIFIED

30° INDEXING

3 Position

2.5 AMPS @ 125 V AC; 350 mA @ 125V DC
CARRY-5 AMPS CONTINUOUS

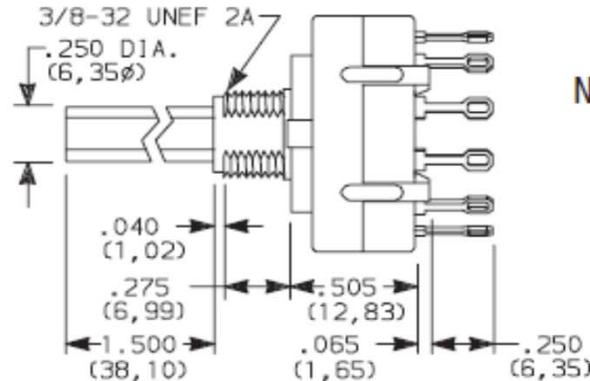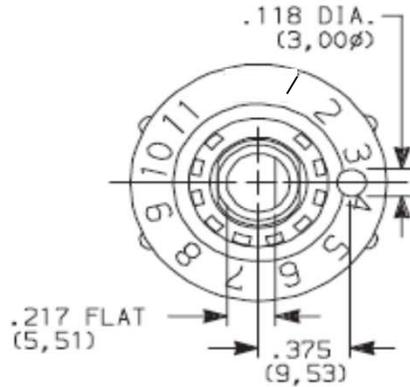


No seal



TERM. NOS.
MOLDED ON HOUSING

Actuator
1.500" high, flatted

Solder lug

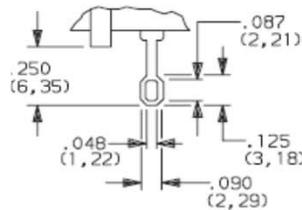

.020 THK.
(0,51)


CONTACT RESISTANCE: Below 20 m Ω typ. initial @ 2-4 V DC, 100 mA, for both silver and gold plated contacts.
INSULATION RESISTANCE: 10⁹ Ω min.
DIELECTRIC STRENGTH: 1,000 Vrms min. @ sea level.
Operating and storage temp: -30° to 85°C

ELECTRICAL LIFE: 15,000 make-and-break cycles at full load up to 300,000 detent operations.

Silver Contact Material

OPERATING & STORAGE TEMPERATURE: -30°C to 85°C

4P MODELS SCHEMATIC

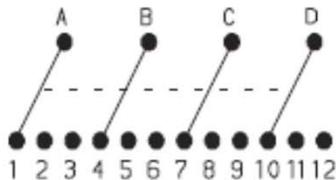

All Terminals

