

Toggle Switches



THREE POLE

3PDT

ON-NONE-ON


35-141

RoHS CERTIFIED

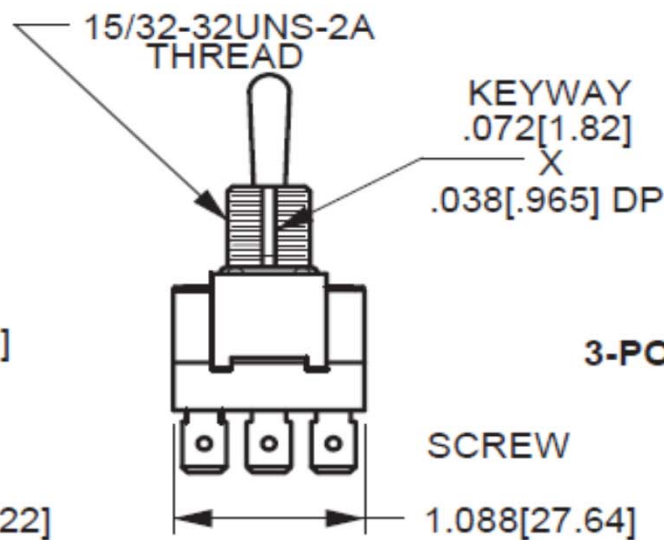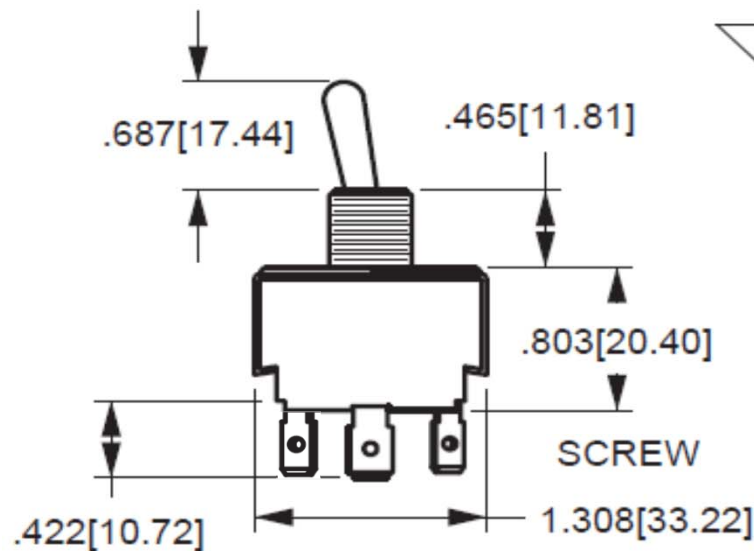

17A 125VAC
12A 250VAC
1-1/2HP 250VAC
1, 2 OR 3 PHASE


3-POLE

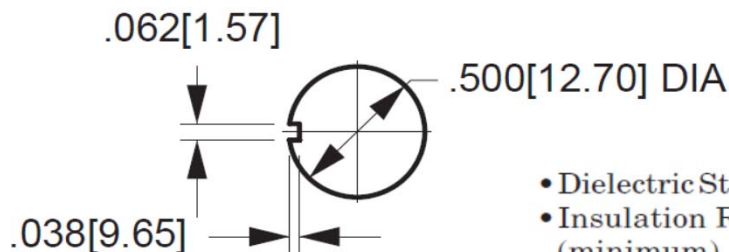

WITH KEYWAY

- Dielectric Strength: 1,000 V (minimum)
- Insulation Resistance: 100 Megohms (minimum)
- Base Material: Phenolic
- Actuator Material: Brass/Nickel Plate or Polycarbonate
- Bushing Material: Brass/Nickel Plate

GC™
ELECTRONICS

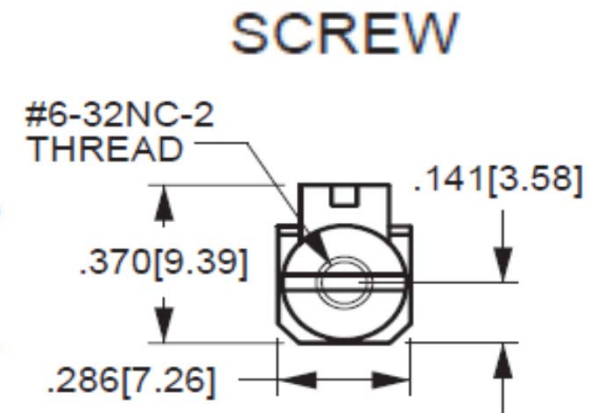

SCREW