

35-0178



UL94V2




35-0178
SPST



ON OFF

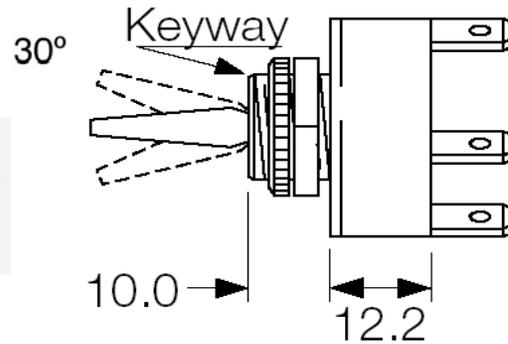


Q.C. (.250")/Solder




.500" Mounting hole

THD
15/32 32

Black Plastic
Paddle




Body and actuator Nylon 6.6
Contact points Silver Alloy



20
AMPS
125VAC

UL 20A 250Vac Non Ind (Single pole)
16(4)A 250Vac T85
CSA 16A 250Vac Non Ind
UL 85°C file E45221, CSA file LR10990



Rated 1/2 H.P. @ 125 VAC 1H.P. @ 250 VAC

