

# Switch Toggle SPDT On-Off-On Bat Handle 0.250" Q.C. Tabs

20A 125Vac \_ 10A 250Vac \_ 3/4 HP (125-250) Vac

HEAVY DUTY



UPC: 010151546289

P/N: 35-3015

UPC: 010151547781

P/N: 35-3015-BU

RoHS: CERTIFIED

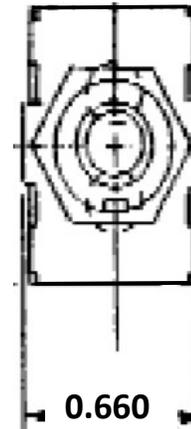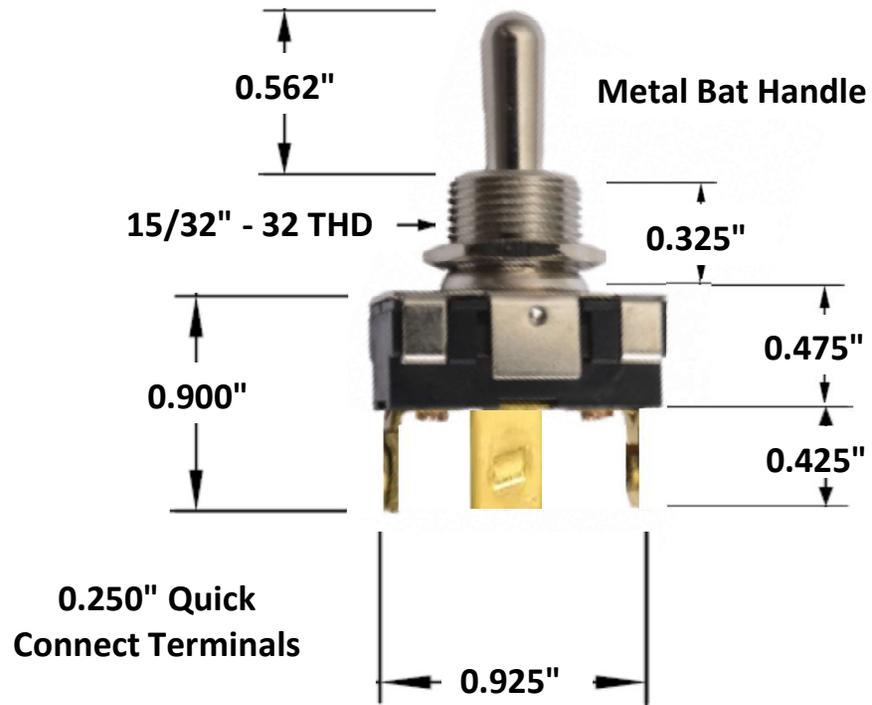

CoO: USA  
HTS: 8536.50.9065

UL Recognized  
CSA Certified



Dielectric strength 1000 Vac  
100,000 Electrical and Mechanical Life Cycles  
Operating Temperature: (14 to 149)°F

