


35-3035

Toggle Switch - SPST - Screw Termination

6A-125VAC, 3A-250VAC. Single-Pole, Single-Throw. Screw Termination. Contact Mechanism: Slow-Make/Slow-Break Butt Contact. Contact Material: Stationary - Copper Alloy/Silver Plated, Movable - Copper Alloy. Stationary (Center) Copper Alloy/Silver Plated. Stationary (End) - Silver Cadmium Oxide Composite. Movable - Silver Cadmium Oxide Composite. Dielectric Strength - 1000 volts RMS Minimum. Mounting Means: 15/32" Diameter Threaded Bushing, Keyway .078-.083 Wide X .037-.043 Deep. Standard Hardware Supplied; One Hex Nut Assembled and One Hex Nut Unassembled.

Toggle Position: Up - ON / Center - NONE / Down - OFF

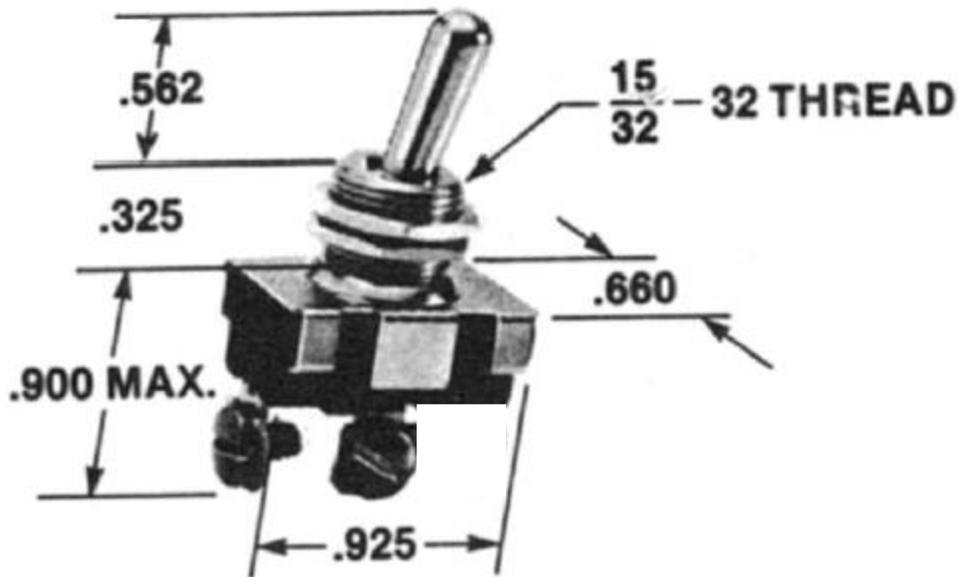

G - 32 SCR. TERM

