



# 35-3055

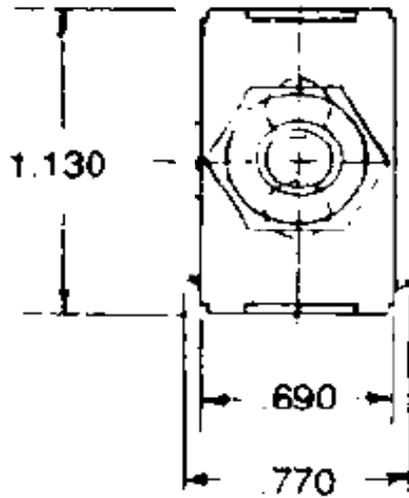

.500" Mounting hole

Bat Handle

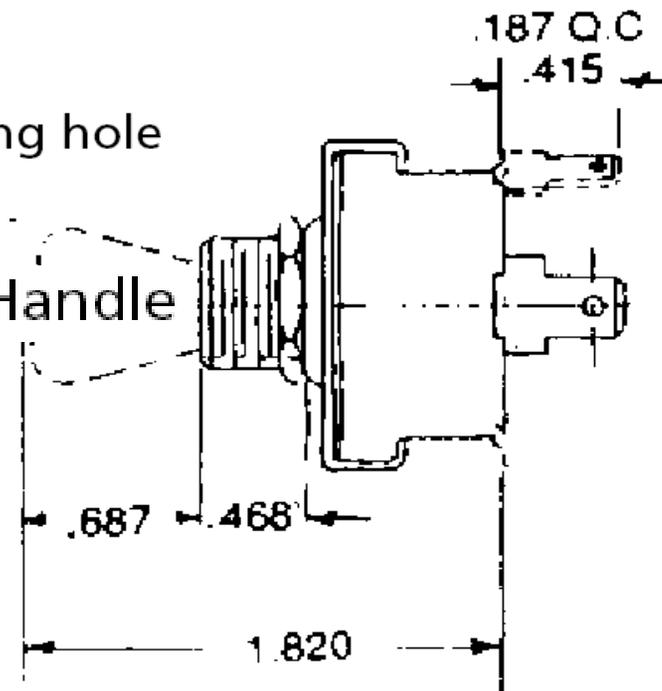

OVER Q.C. TERM



CSA Certified

15/32" Diameter Threaded Bushing  
Keyway (.078-.083) Wide X (.037-.043) Deep

**35-3055**  
**SPST**



**Specifications:**

*Insulation Resistance: 100 Megohms (min.)*

*Dielectric Strength: 1000V RMS (min.)*

*Contact Material: Copper Alloy - Silver Plated*

*Terminal Material: Alloy - Silver Plated*

*Temperature Rating: -30°C to 85°C*

( ) = Momentary

CIRCUIT FUNCTION	POLES & THROWS	AMPS 125VAC	AMPS 250VAC	H.P. 125-250 VAC	ACTUATOR MATERIAL	BUSHING LENGTH	TERMINAL TYPE
OFF (ON)	SPST	20	10	3/4	Brass	0.468	Q.C. (.250")