

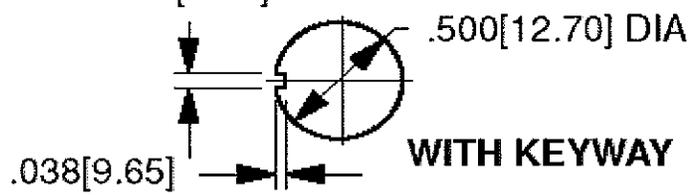


35-3127

MOMENTARY
RoHS: CERTIFIED

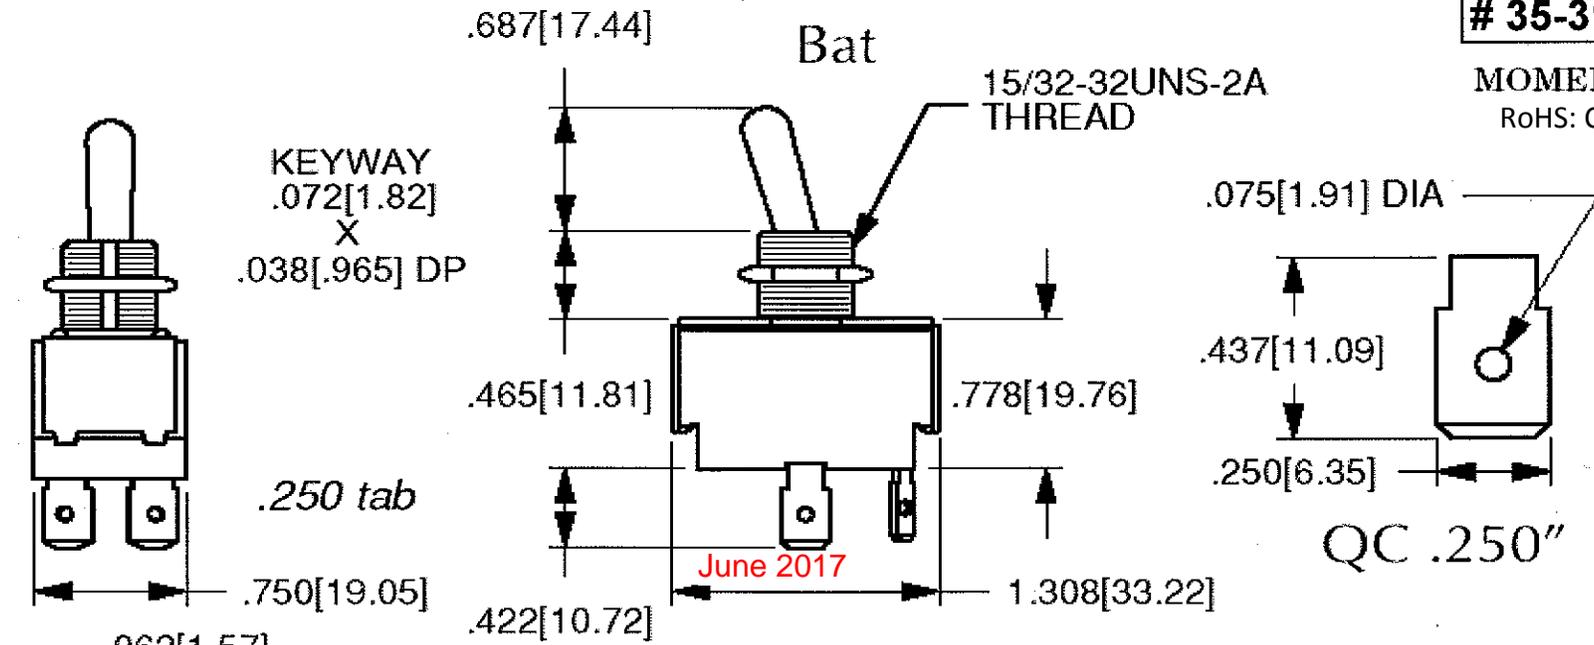

10A 250VAC
15A 125VAC
3/4HP 125-250VAC



June 2017

4 Tabs, not 6

DPDT

POSITION 2
POSITION 1 POSITION 3
(ON) OFF (ON)

REVERSING DOUBLE POLE DOUBLE THROW

Dielectric Strength
UL/CSA: 1000V - live to dead metal parts & opposite polarity, VDE: 4000V - live to dead metal parts; 1250V - opposite polarity & across open contacts

Electrical Life
50,000 cycles- maintained
25,000 cycles- momentary

Mechanical Life
100,000 cycles

Operating Temperature
32°F to 185°F (0° to 85°C)