



toggle length
0.687

bushing length
0.465

Progressive Two Circuit

35-3135

1 On Off
1 & 2 On

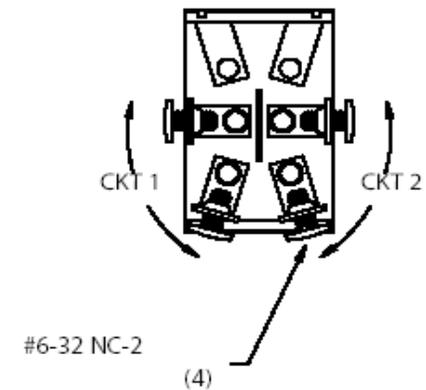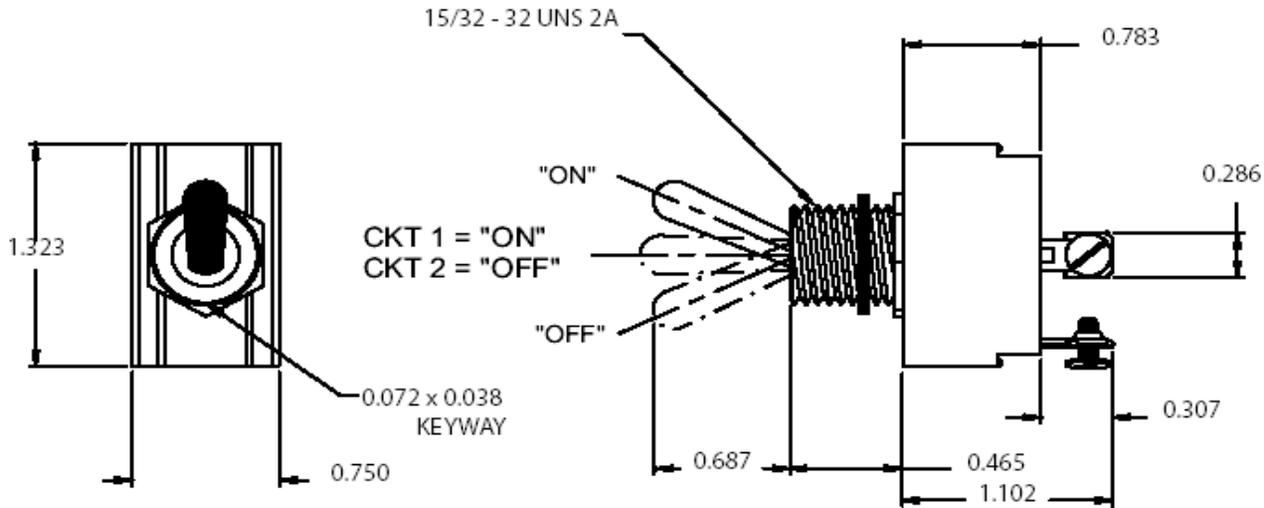

AMPS	AMPS
125VAC	250VAC
15	10

3/4 HP 125-250VAC

Dielectric Strength

UL/CSA: 1000V - live to dead metal parts & opposite polarity
VDE: 4000V - live to dead metal parts; 1250V - opposite polarity & across open contacts

Electrical Life

50,000 cycles- maintained
25,000 cycles- momentary

Mechanical Life

100,000 cycles

Operating Temperature

32°F to 185°F (0° to 85°C)

3 position SW

