



PADDLE

All nylon bushing and toggle.


SPDT ON-OFF-ON

35-3150

RoHS CERTIFIED

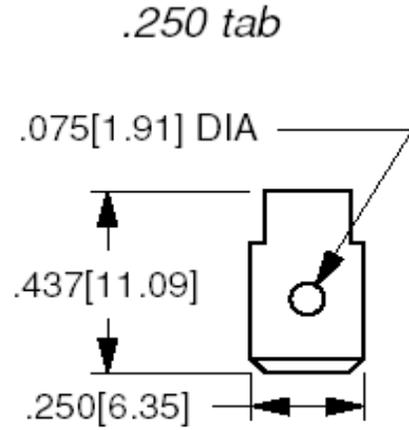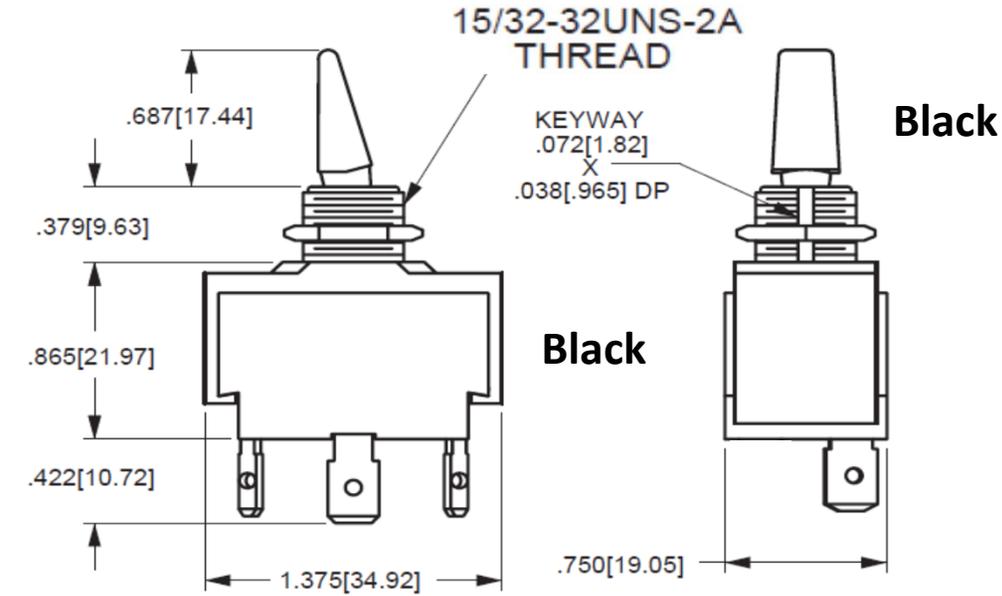

20A 125-277VAC
1-1/2HP 125VAC
2HP 250VAC

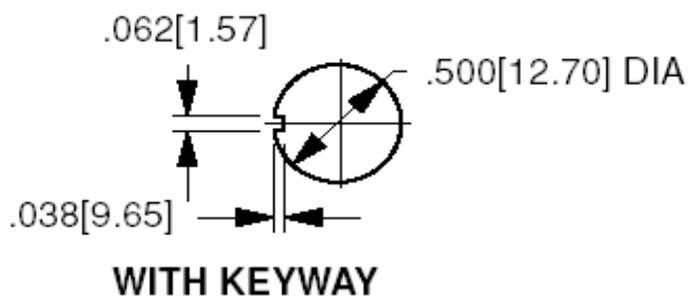

Electrical Life
50,000 cycles- maintained
25,000 cycles- momentary

Mechanical Life
100,000 cycles

Operating Temperature
32°F to 185°F (0° to 85°C)