

PADDLE



All nylon bushing and toggle.

SPDT


(ON)-OFF-(ON)

35-3153

RoHS CERTIFIED

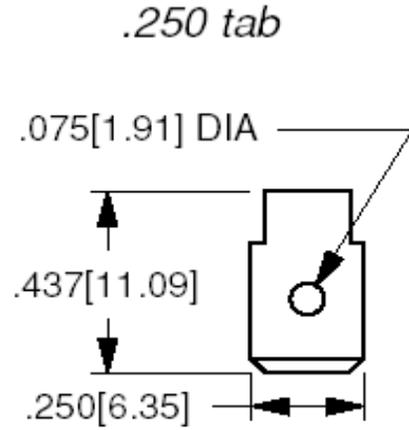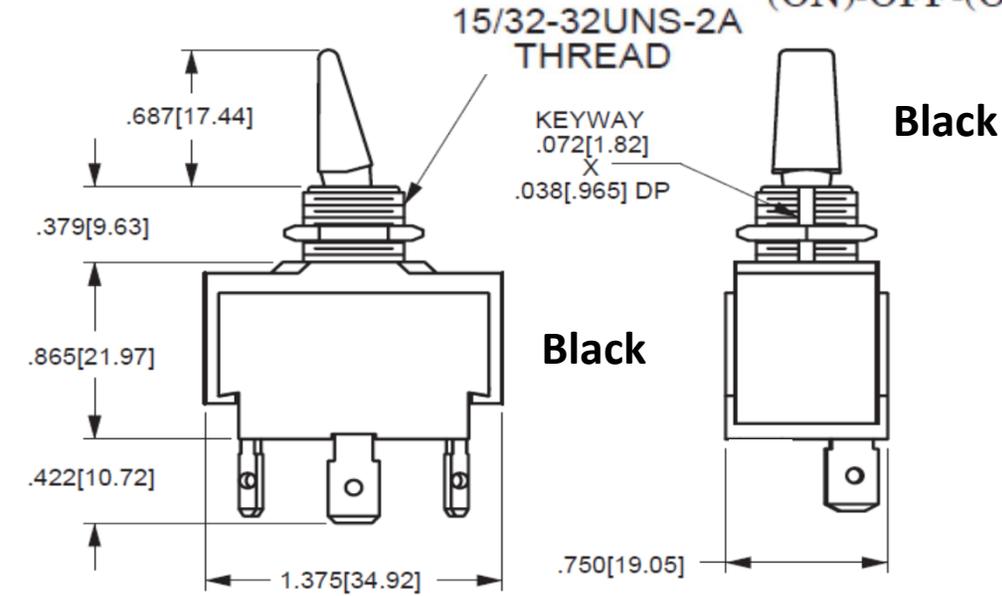

15A 125VAC
10A 250VAC
3/4HP 125-250VAC

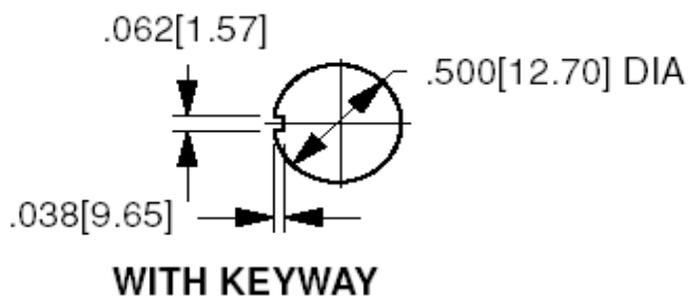

MOMENTARY

Electrical Life
50,000 cycles- maintained
25,000 cycles- momentary

Mechanical Life
100,000 cycles

Operating Temperature
32°F to 185°F (0° to 85°C)