
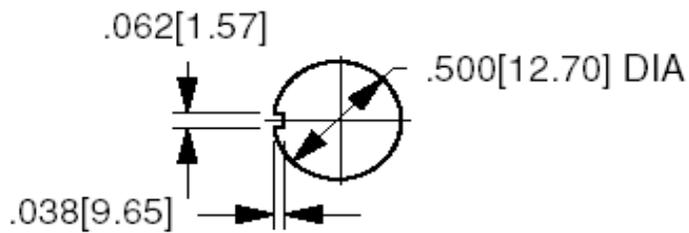


# PADDLE

All nylon bushing and toggle.

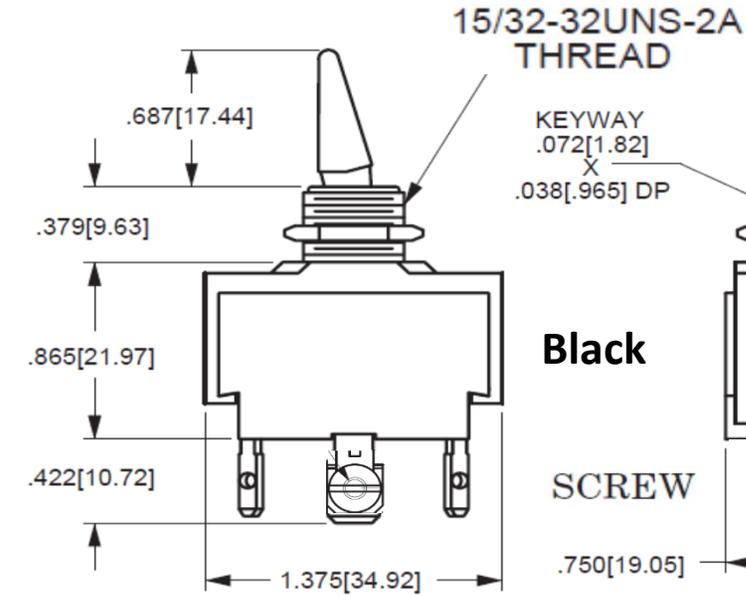

WITH KEYWAY

# SPDT (ON)-OFF-(ON)


# 35-3169

RoHS not all Stock

Black

SCREW  
TERM.

#6-32NC-2  
THREAD

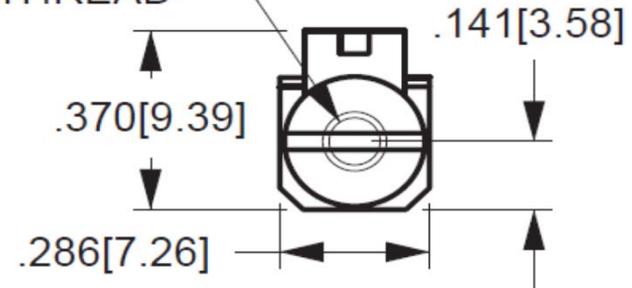

15A 125VAC

10A 250VAC

3/4HP 125-250VAC

MOMENTARY

### Electrical Life

50,000 cycles- maintained

25,000 cycles- momentary

### Mechanical Life

100,000 cycles

### Operating Temperature

32°F to 185°F (0° to 85°C)