


KEYLOCK SWITCHES

35-3190

Key Removal in:
2 Positions


SPDT
On/On

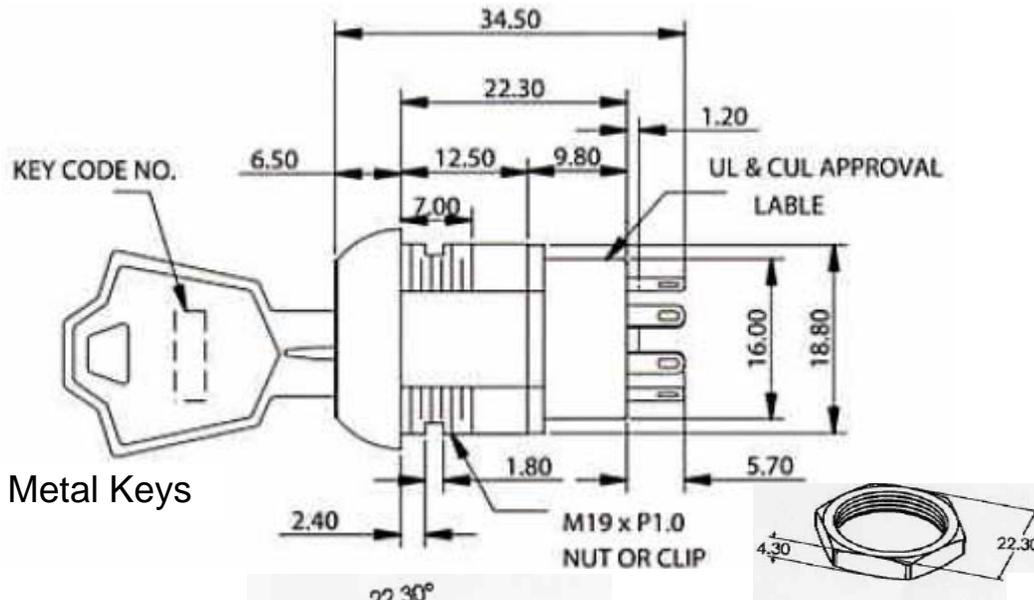


Metal Keys




HOLE SIZE

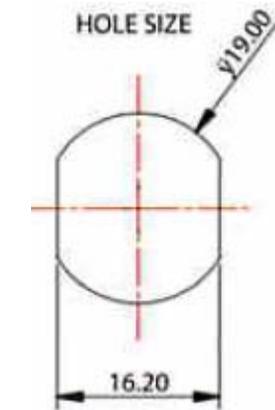


Contact Rating:
4A 125VAC / 28VDC
2A 250VAC



Contact Resistance:
Below 10 Milli OHMS
Insulation Resistance:
10 Mega OHMS Min.
Dielectric Strength:
1000V RMS Min. Sea Level

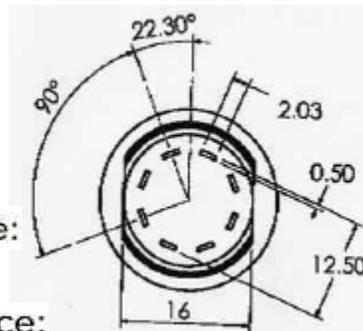

Index:
90°



Electric Life:
6,000 Make-and Break Cycles