

KEYLOCK SWITCHES

4 tumbler w/detent



Metal Keys

On/On


Key Removal in:
2 Positions

35-3192


RoHS: CERTIFIED

DPDT

Position	Contacts Make
1	1-8 and 4-5
2	1-3 and 7-5

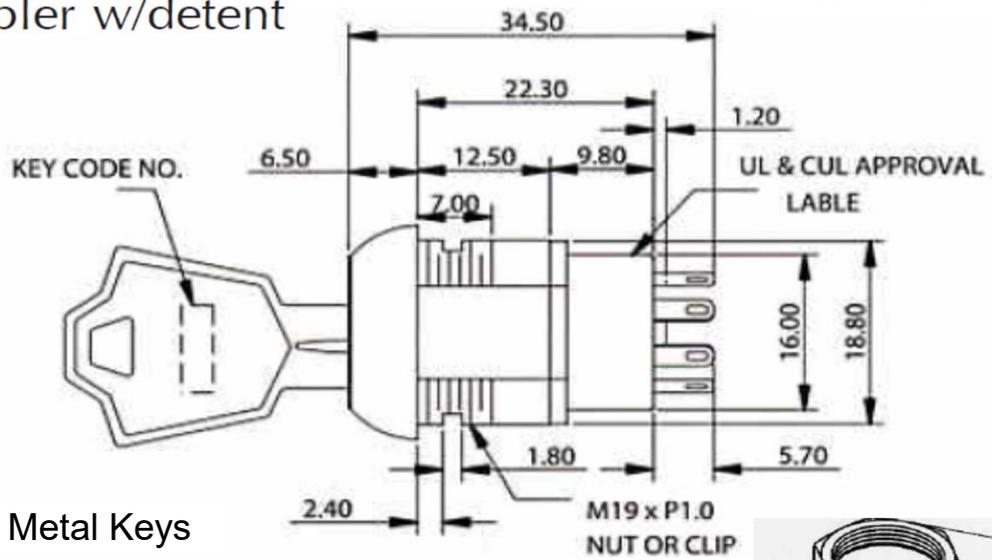


Contact Rating:
4A 125VAC / 28VDC
2A 250VAC

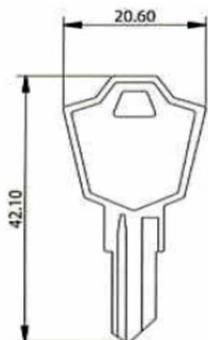


Contact Resistance:
Below 10 Milli OHMS
Insulation Resistance:
10 Mega OHMS Min.
Dielectric Strength:
1000V RMS Min. Sea Level

HTS: 8536.50.9065
CoO: Taiwan

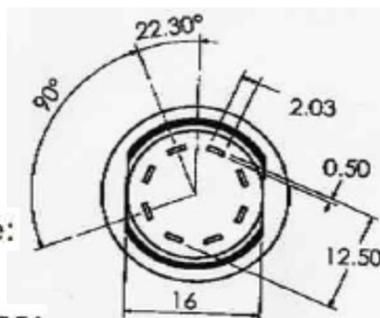

Index:
90°
2 Positions

Sd Eyelet

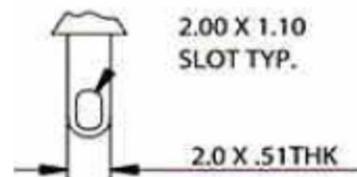

Electric Life:
6,000 Make-and Break Cycles

