

6" Wire leads 22 AWG





SPDT

On/On

35-3194

90° Indexing

Key Removal in: Position 1

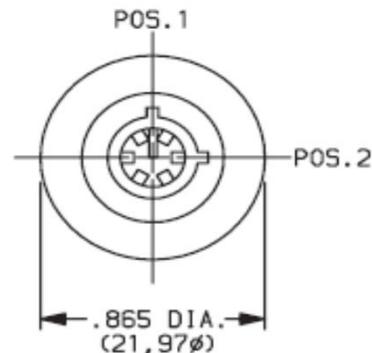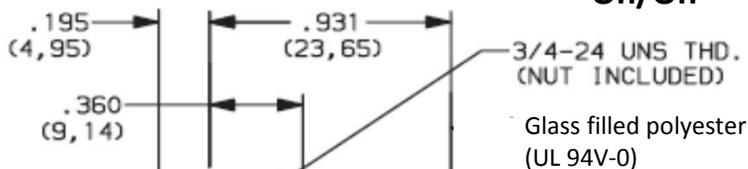


KEY SHOWN IN POS. 1

Silver plated Copper Contact Material

.115 (2, 92) SLOTS IN THIS LOCATION FOR MOUNTING STYLE 'D' CLIP

2 die cast zinc alloy Barrel keys with chrome plating

4 AMPS @ 125 V AC or 28 V DC
2 AMPS @ 250 V AC (UL/CSA)

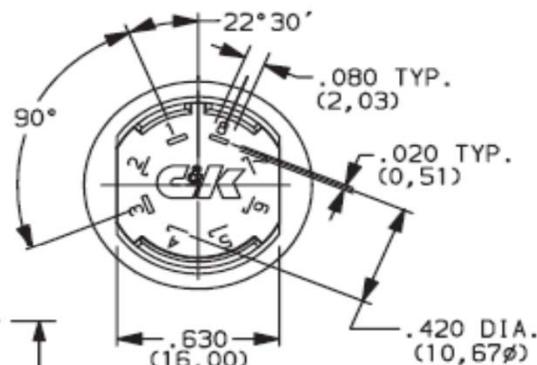



No seal

6 Tumbler tubular lock




Zinc alloy with stainless steel facing

PANEL MOUNTING

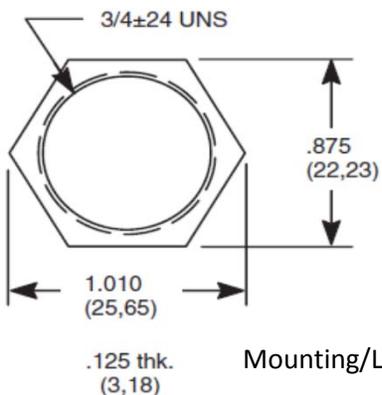

Black wire



Mounting/Lock Style With nut

RoHS CERTIFIED