




SPST OFF-ON

Paddle Toggles with Square Bezel

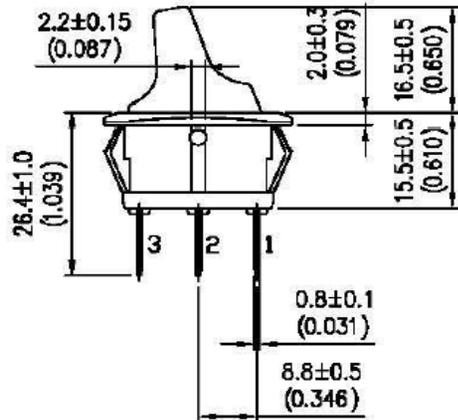

Nylon# 66, Black

Ø2.6±0.2 (Ø0.102)

6.35±0.1 (0.25)



20A 12V DC

Fully illuminated actuator.


35-3320

35-3321

Mounting Hole




2.2±0.05
thickness=1.0~4.0mm



GCE P/N	color	Amps @12Vdc	Sw Type	Mount Hole	Terminals
35- 3320	red	20	LED	.944"	.250" Q.C.
35- 3321	green				

Nylon housing with square bezel.



Paddle Handle LED Toggle Switches

Contact Resistance = 50 mOhm max.

Insulation Resistance = 500Vdc, 100 MOhm min.

Dielectric Strength = 1,500 Vac - 1 minute

Three (1/4") male blade terminals.

Polycarbonate housing with colored 41/64" wedge handle.

