





Nylon #66, Black
SPST OFF-ON




LED Paddle Toggles

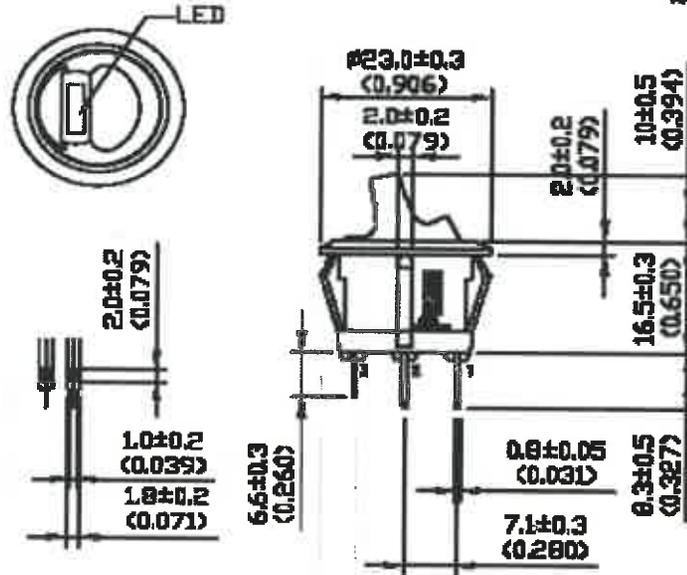


20A 12V DC

35-3330
35-3331
35-3332
35-3333

Mounting Hole



Thickness: 2.0~3.0

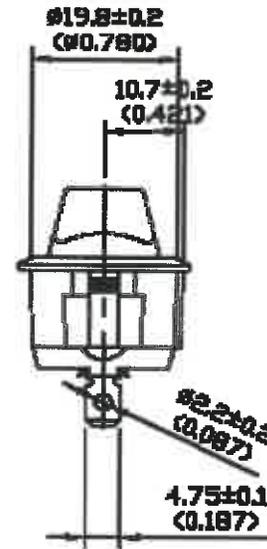

Paddle toggle switches with an LED actuator that is illuminated at the tip.

GCE P/N	color	Amps @12Vdc	Sw Type	Mount Hole	Terminals
35- 3330	red	20	LED	.866"	.187"
35- 3331	green	20	LED	.866"	.187"
35- 3332	amber	20	LED	.866"	.187"
35- 3333	blue	20	LED	.866"	.187"

Tip Paddle Handle LED Toggle Switches

Contact Resistance = 50 mOhm max.
 Insulation Resistance = 500Vdc, 100 MOhm min.
 Voltage Breakdown = 1,500 Vac - 1 minute

Two (3/16") male blade and two solder terminals.

Polycarbonate housing with colored 41/64" wedge handle.

Nylon housing with round bezel.

