



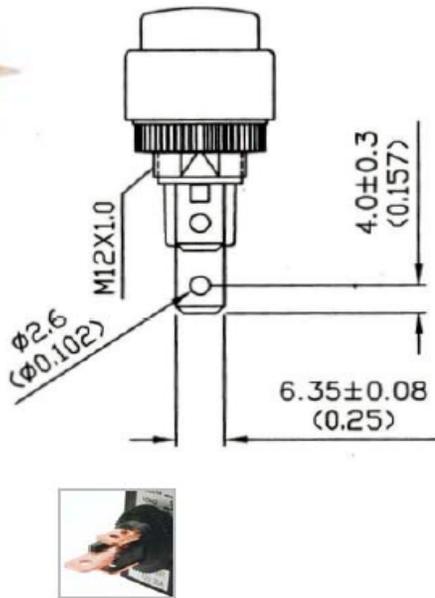


SPST OFF-ON



LED Oval Rocker Switches

Rated at 30A/12V DC.

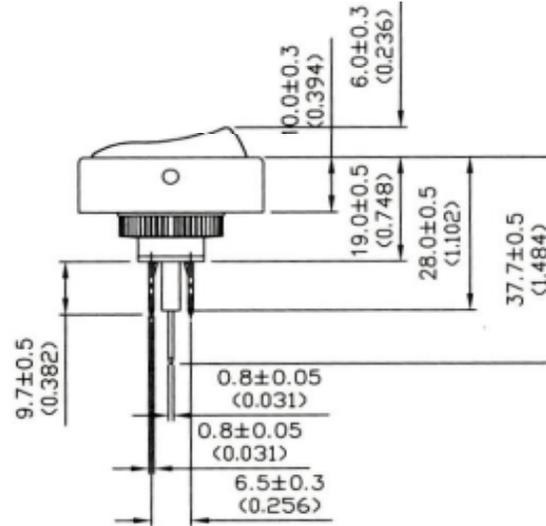


# 35-3370

# 35-3371

# 35-3372

# 35-3373

Mounting Hole

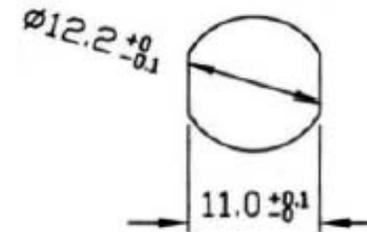

Oval nylon housing with LED illuminated pin hole rocker switches.

| GCE P/N  | color | Amps @12Vdc | Sw Type | Mount Hole | Terminals     |
|----------|-------|-------------|---------|------------|---------------|
| 35- 3370 | red   | 30          | LED     | .500"      | .250"<br>Q.C. |
| 35- 3371 | green |             |         |            |               |
| 35- 3372 | amber |             |         |            |               |
| 35- 3373 | blue  |             |         |            |               |

LED Rocker Switches

Contact Resistance = 50 mOhm max.

Insulation Resistance = 500Vdc, 100 MOhm min.

Dielectric Strength = 1,500 Vac - 1 minute

Three (1/4") male blade terminals.

Black, Nylon#66

