
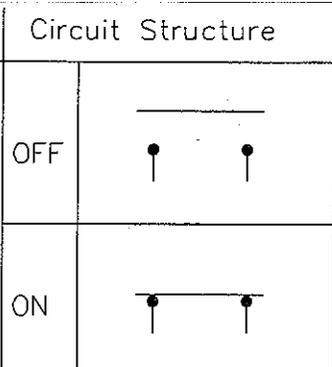


35-3454-R


Rating	4A 250V, 8A 125V 10A 125V.A.C., 1/3HP 125V.A.C.
Contact R	50m ohm Max.
Insulation R	DC 500V 100M ohm Min.
Dielectric Strength	AC 1500V 1 minute
Circuit	2P SPST ON-OFF
BUTTON: BRASS/BRIGHT NICKEL	

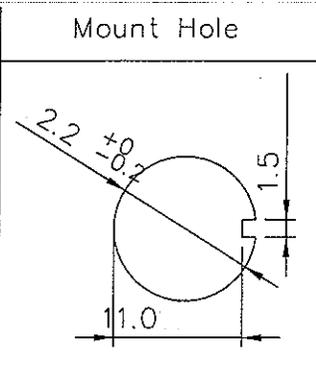

NOTES:

1. RECOGNIZED.

STRANDED BARE COPPER WIRE 18 AWG 105°C UL & CSA. AWM #1015

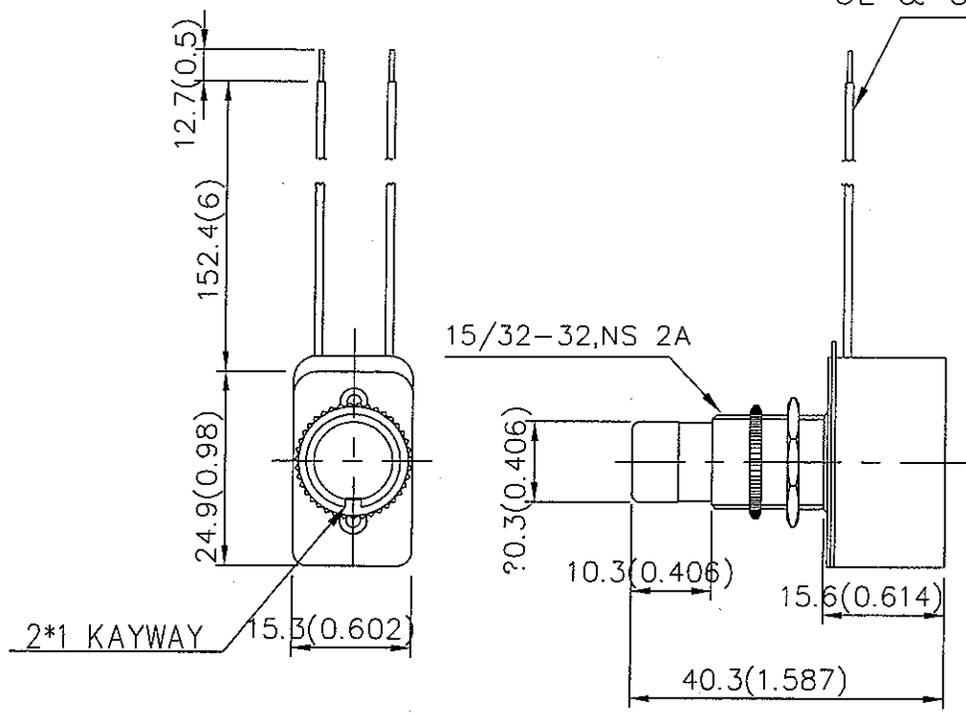

KNURL NUT ASSY
HEX NUT ASSY

RATED CAPACITY:
4 AMP, 250V
8 AMP, 125V
10 AMP, 125V.A.C
1/3 HP, 125V.A.C.

ON-OFF MAINTAINED CONTACT
SINGLE POLE, SINGLE THROW

Date		Name		Descriptions	
Drawing	Check	Approval		SCI No.	
				Model No.	
Unit			mm	inch	

35-3454