
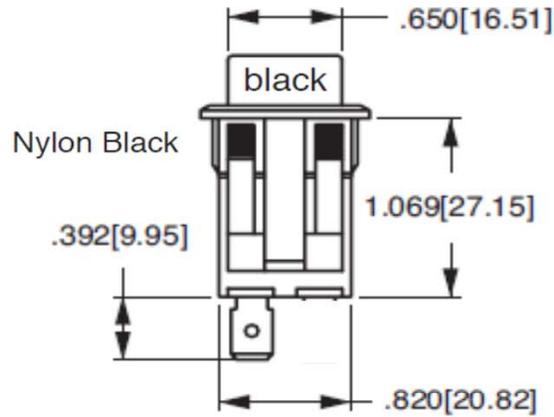


Standard Appliance Rocker Switch

SPDT



On - Off - On

35-3620

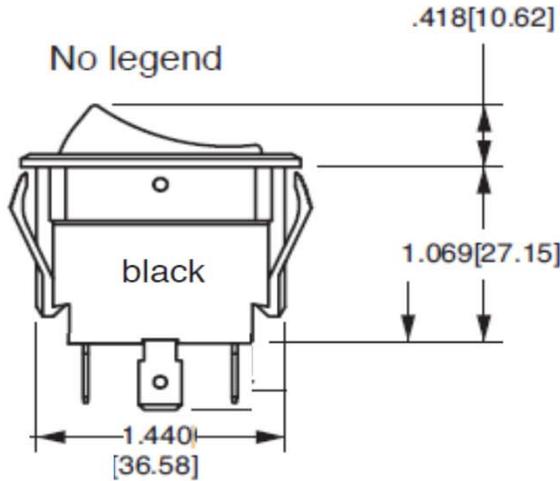


15 amps, 125 VAC
 10 amps, 250 VAC
 3/4 HP 125-250 VAC
 15A (6-28)VDC

100,000 cycles minimum

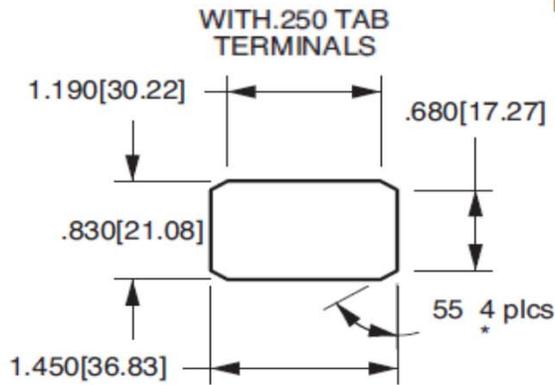

Curved/Smooth Face Gloss:

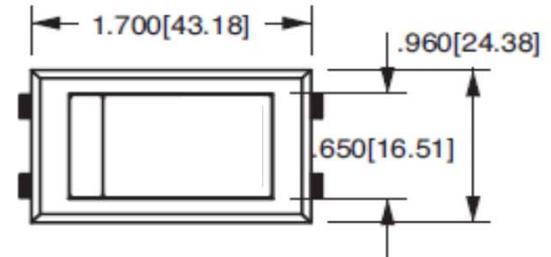

MOUNTING HOLE
 (Nylon Snap-in Brackets)
 Panel Thickness:
 .040 min. - .250 max.

RoHS CERTIFIED

TIGC51-6S-BL-NBL