
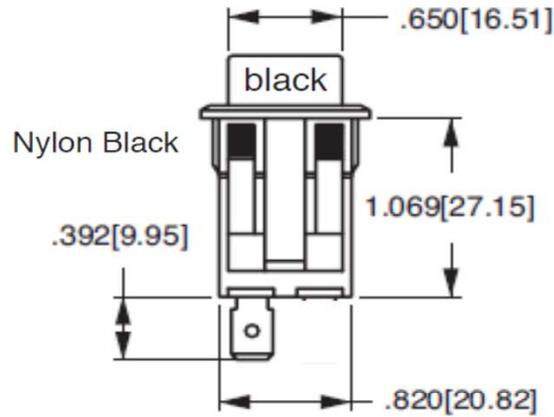


Standard Appliance Rocker Switch

SPST



On - None - Off

35-3636

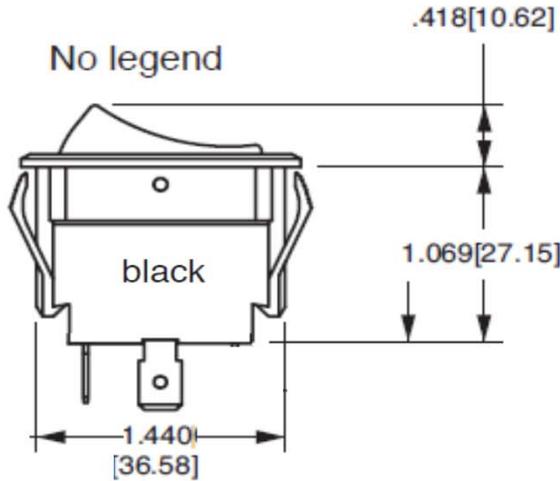


**20A 125-277VAC
1 1/2HP 125VAC
2HP 250VAC**

100,000 cycles minimum

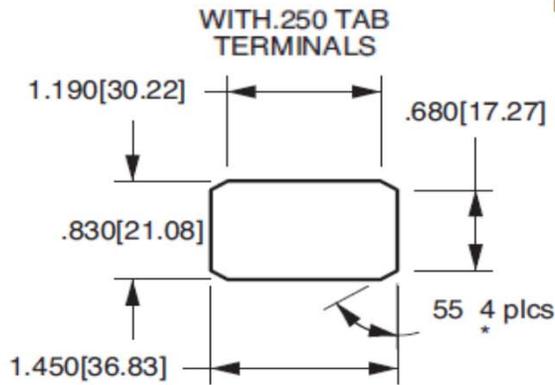

Curved/Smooth Face Gloss

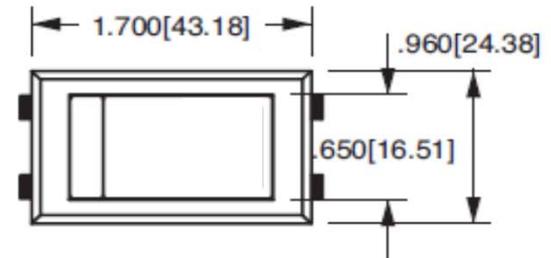

MOUNTING HOLE
(Nylon Snap-in Brackets)
Panel Thickness:
.040 min. - .250 max.

RoHS CERTIFIED

TIGA721-6S-BL-NBL