
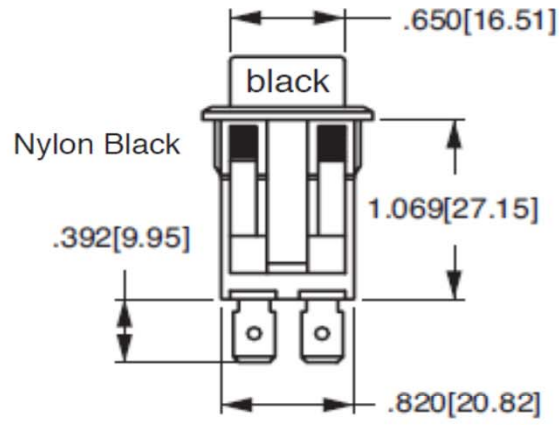


Standard Appliance Rocker Switch



DPDT
(On) - Off - On

35-3690

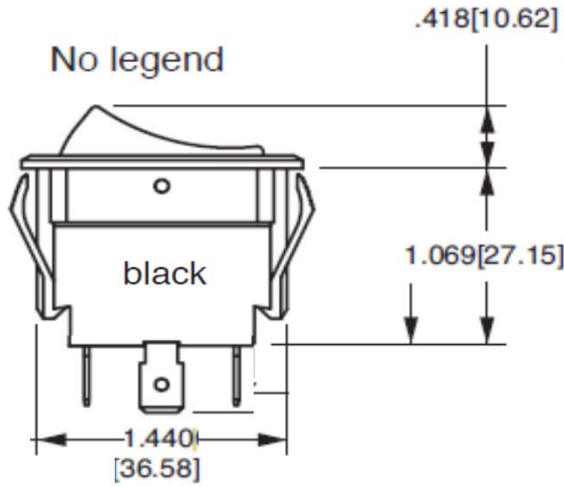


15 amps, 125 VAC
10 amps, 250 VAC
3/4 HP 125-250 VAC
15A (6-28)VDC

100,000 cycles minimum

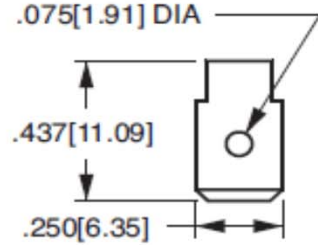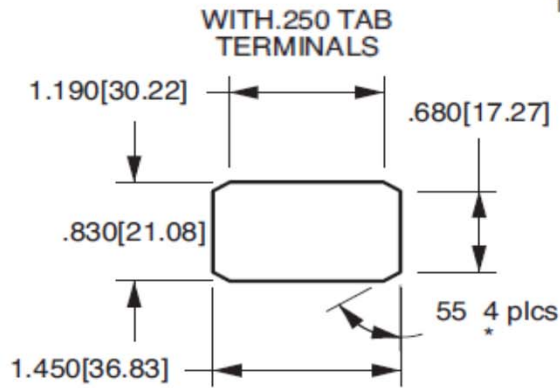

Curved/Smooth Face Gloss:

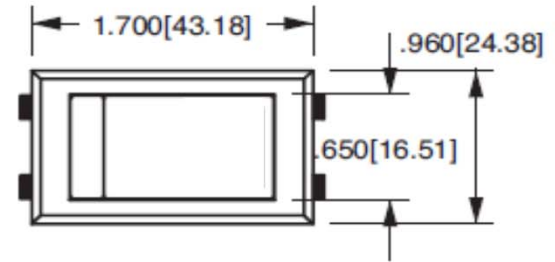

MOUNTING HOLE
(Nylon Snap-in Brackets)
Panel Thickness:
.040 min. - .250 max.



RoHS CERTIFIED

TIGM5B-6S-BL-NBL