
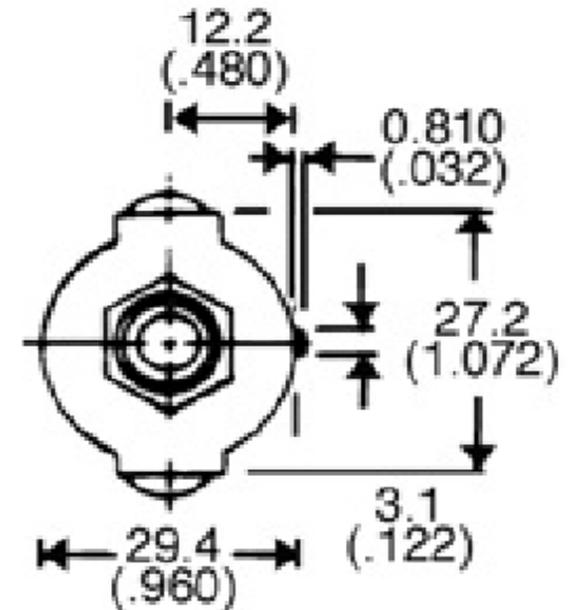


Shorting

35-375

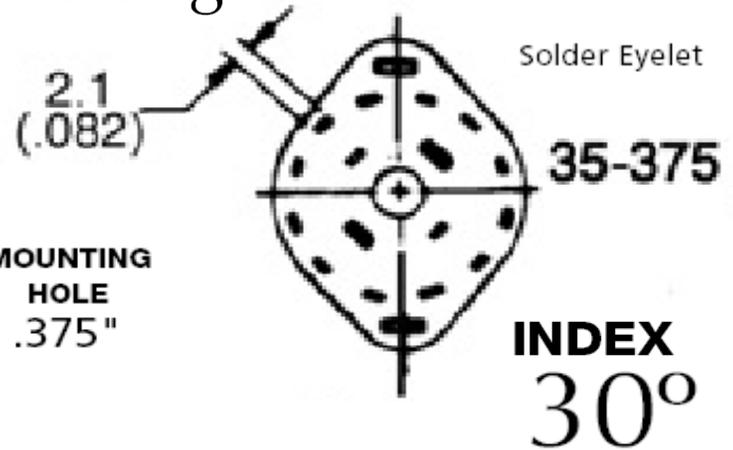

Positions	Poles
6	2

0.3
Amps
125 VAC
 Or 30V DC



Specifications:
Initial Contact Resistance: 25 Milliohms @ 2-4V DC, 1A
Insulation Resistance: 1000 Megohms
Dielectric Strength: 500V AC RMS
Contact Material: Silver Plated Phosphor Bronze
Terminal Material: Silver Plated Phosphor Bronze
Shaft and Bushing: Aluminum
Bracket: Steel, zinc plated