

35-3755

ROCKER SWITCH

RATING : 15A 125V AC (UL,CSA)

10A 250V AC (UL,CSA)



10(4) 250V AC (KTL)

ELECTRICAL : CONTACT RESISTANCE : 30m Ω MAX




DIELECTRIC VOLTAGE : AC 1,500V FOR ONE MINUTE

LEAKAGE RESISTANCE : 500 M Ω Min

MECHANICAL : LIFE-TIME : 6,000 CYCLES MIN

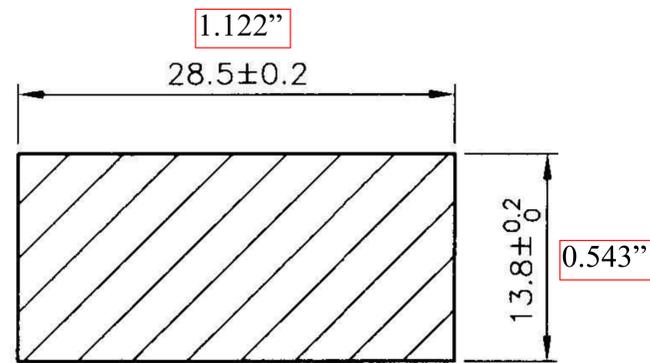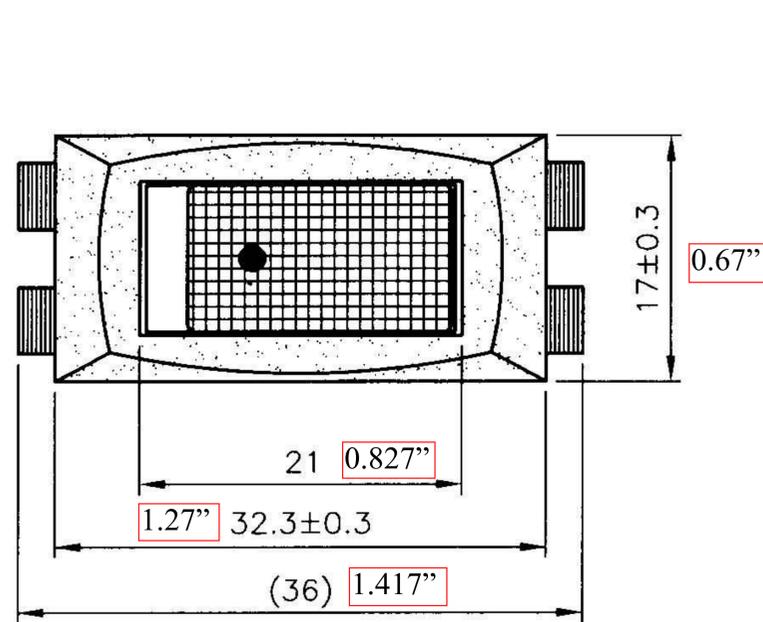

PANEL CUT OUT

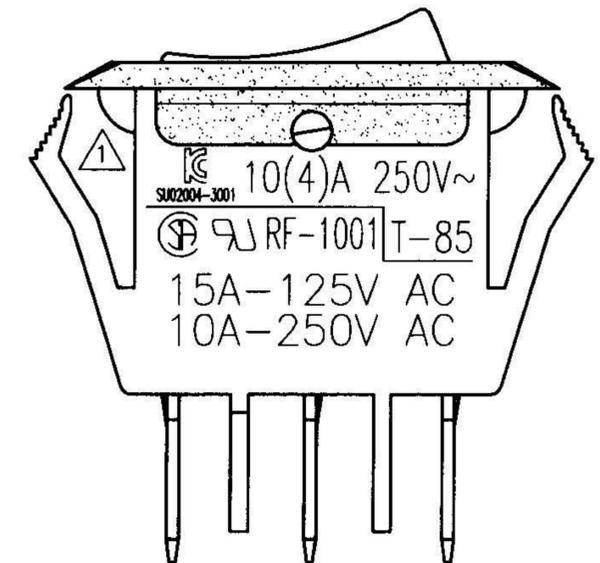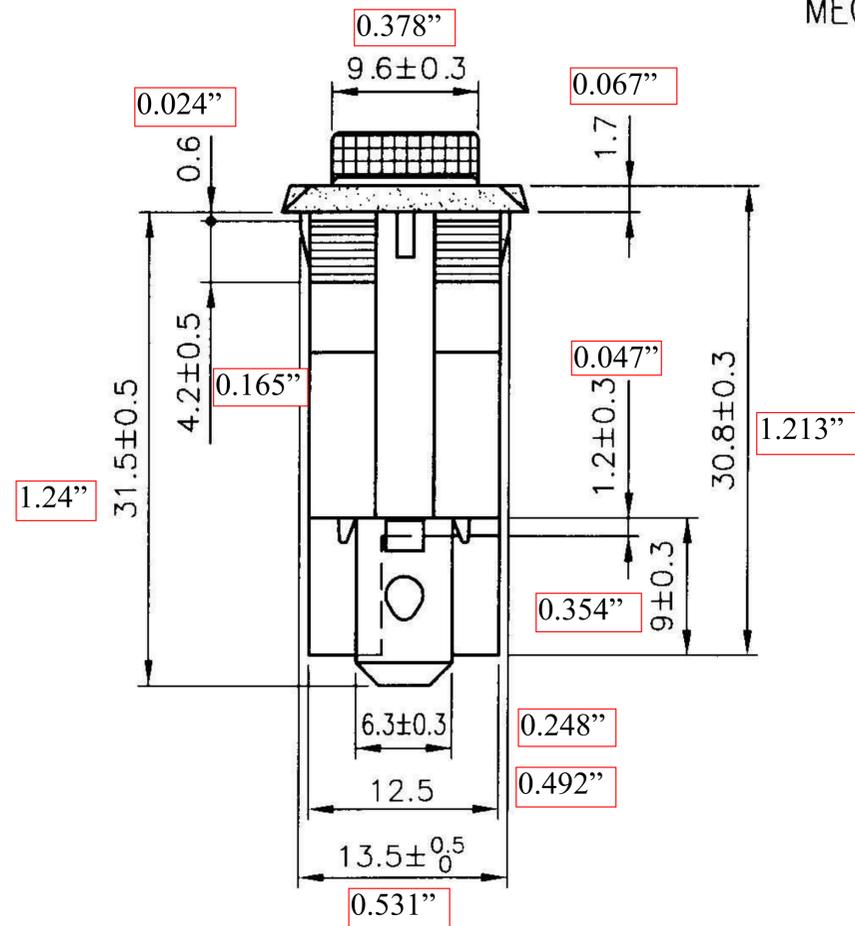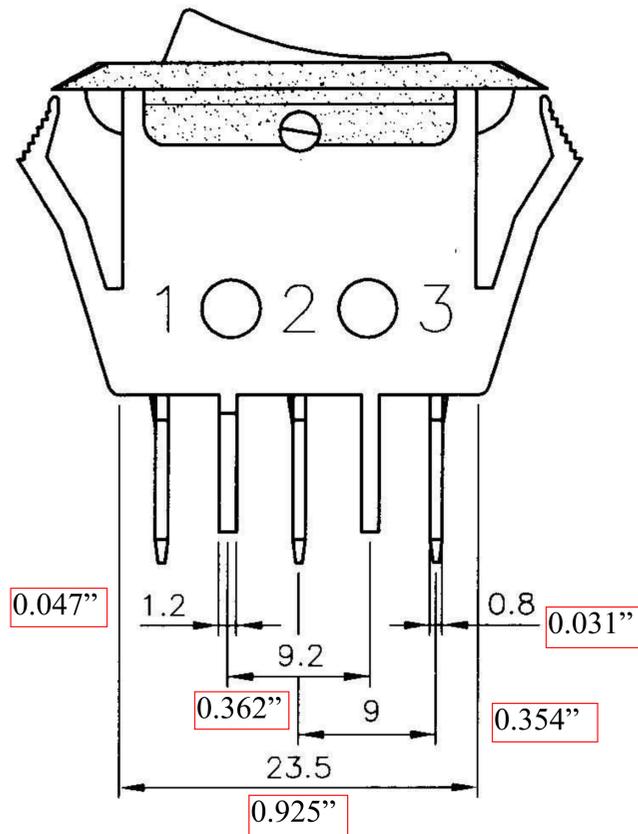

35-3755

5	→			GENERAL TOLERANCE	approved	checked	designed	drawn	ALL SIZE ARE IN	MM	
4	→			GRADATION TOLERANCE					SCALE	1.5:1	
3	→			X					MAT'L	**	DRAWING NO.
2	→			X.X					MATERIAL NO.		
1	⊙ →			X.XX							
NO.	DESCRIPTION	APPROVED	DATE	ANGLE	±1°					110V)	