

HEAVY-DUTY SNAP ACTION SWITCH

15A 125VAC / 250 VAC

SPDT

momentary action



35-3900

RoHS: CERTIFIED


Pin Plunger

Actuator

Screw Terminal

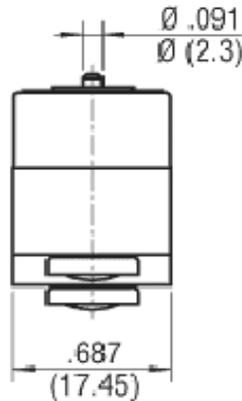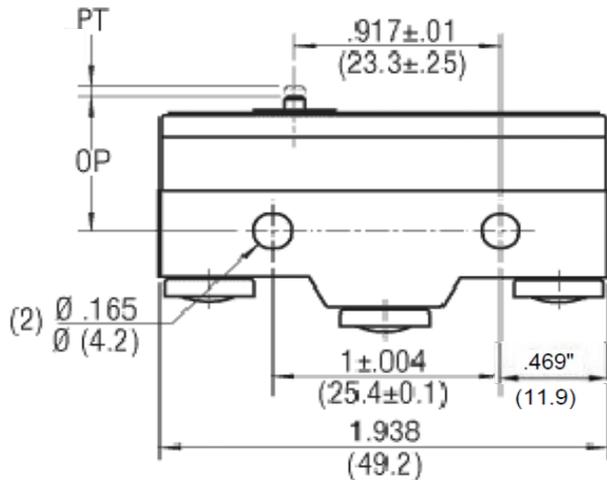

Screw Terminal

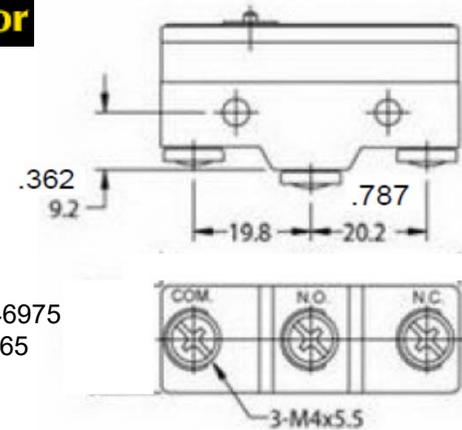

UPC: 010151546975
HTS: 8536509065
CoO: TW

Operating Force(OF): 250~350g (8.8 to 12.3)oz.

Releasing Force(RF): 114g 4 oz.

PreTravel 0.016" (0.4mm)

Overtravel(OT): 0.005" (0.13mm)

Movement Differential(MD): 0.05mm (DT) 0.002"

Operating Position(OP): 15.9±0.4mm 0.626"

OP= 0.610 / 0.642



Dielectric Strength: AC 1,000V for 1 Minute

Electrically Life: 100,000 operations min.

Mechanical Life: 1,000,000 operations min.

Insulation Resistance: 100 MΩ Mim. 500V DC

Contact Resistance: 15mΩ max.