
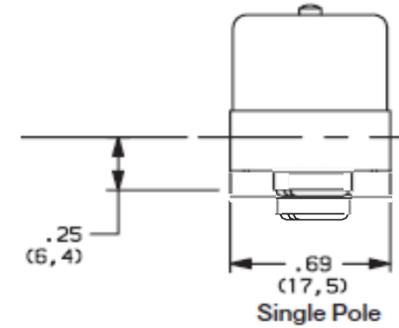


Standard Precision Snap-acting Switches

SPDT

35-3903

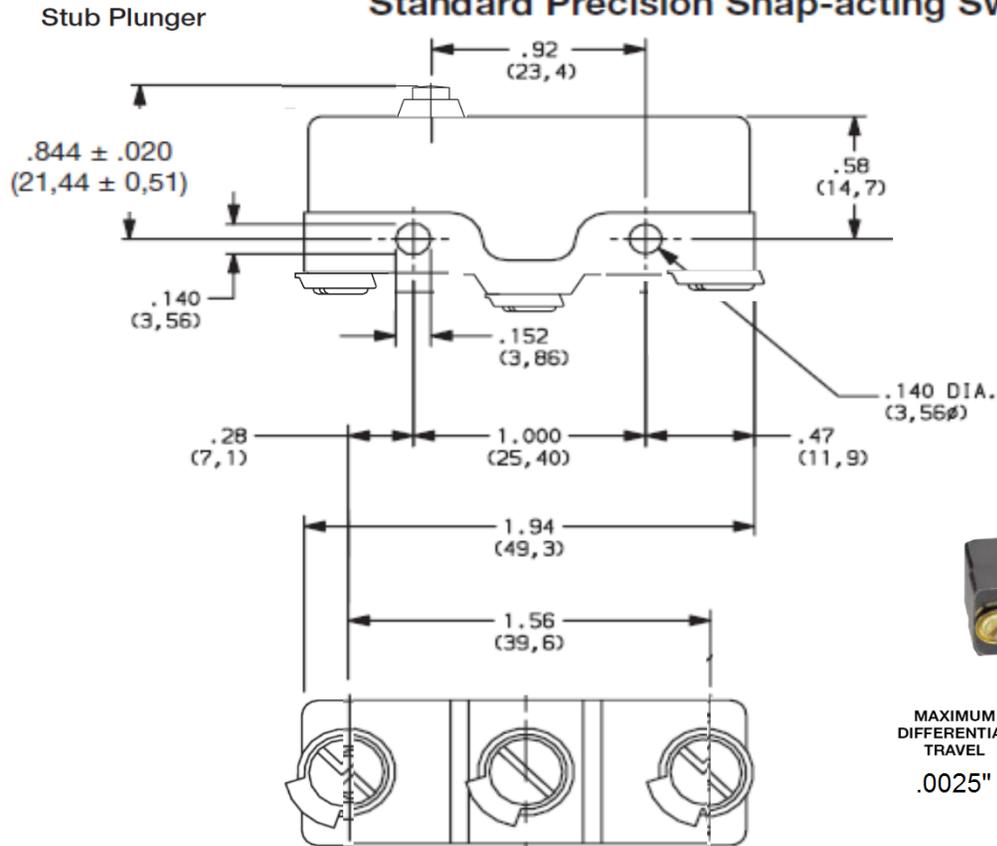

MAXIMUM DIFFERENTIAL TRAVEL	MAXIMUM PRETRAVEL	MINIMUM OVERTRAVEL
.0025"	.022"	.055"

Operating Force

20 oz./567 grams
13 oz./368 grams

Contact Separation": 0.020"

Electrical Rating

20 A, 125, 250, 480 V AC; 0.25 A,
250 V DC; 0.5 A, 125 V DC; 3/4 HP,
125 V AC; 1 1/2 HP, 250 V AC

Terminations

Step base, cup washers, 6-32 screws

Actuator

Stub plunger

UPC: 010151120472

HTS: 8536.50.9065

COO: CR

