

# SNAP ACTION

## Single Pole Standard Precision Snap-acting Switch

# 35-3908

### SPDT

Actuator  
High overtravel plunger

MOUNTING SCREWS: Torque 3 in/lbs max.

HOUSING: Heat resistant/electrical grade phenolic.

#### Electrical Rating

20 A, 125, 250, 480 V AC; 0.25 A, 250 V DC; 0.5 A, 125 V DC; 3/4 HP, 125 V AC; 1 1/2 HP, 250 V AC

#### Operating Force

20 oz./567 grams

MINIMUM  
RELEASE  
FORCE  
(OZ./GRAMS)  
4  
110

#### Contact Separation



.020"

#### Termination:

Step base, cup washers,  
6-32 screws

MAXIMUM  
PRETRAVEL  
(IN/MM)  
.025  
(0,64)

MINIMUM  
OVERTRAVEL  
(IN/MM)  
.22  
(5,6)

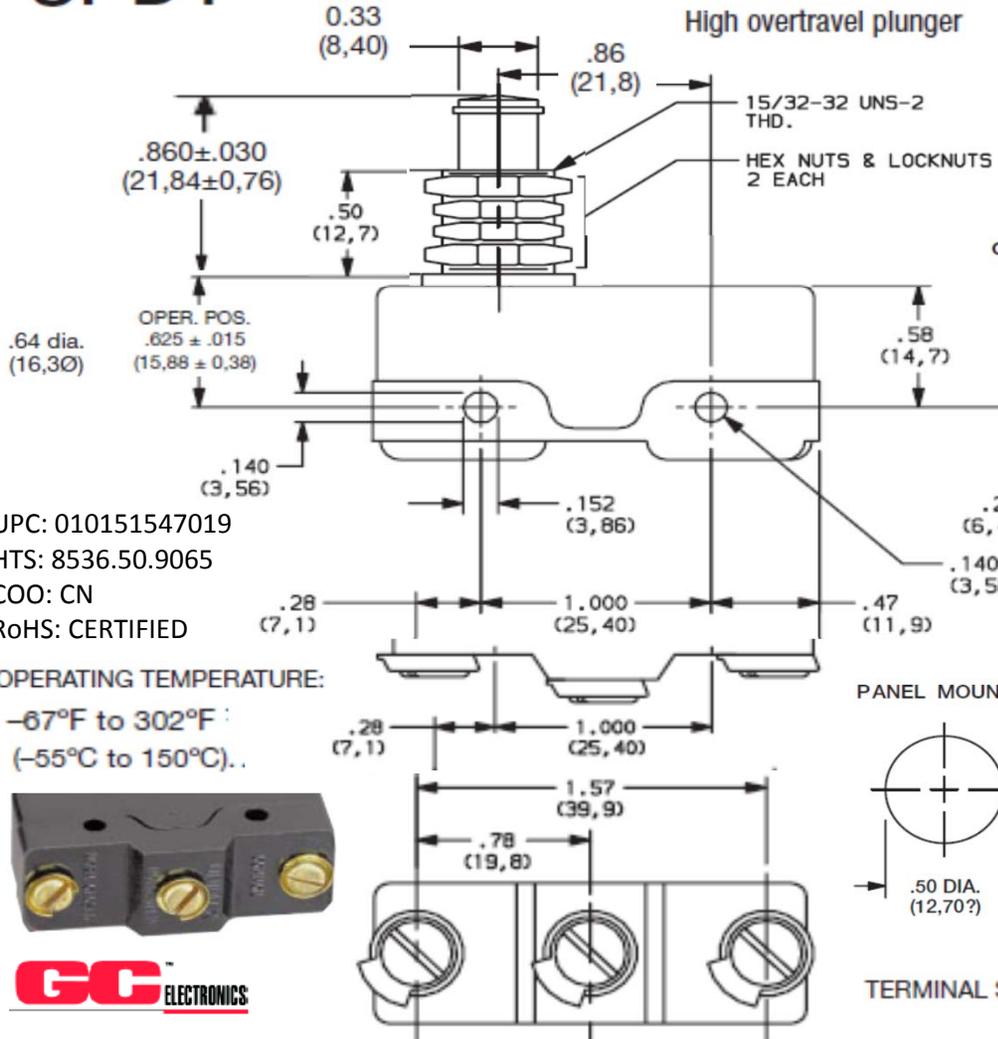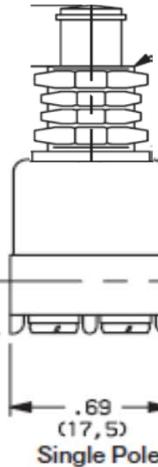

PANEL MOUNTING BUSHING: Torque 4-6 in/lbs max.  
DIELECTRIC STRENGTH: 1,500 Vrms min. @ sea level.

INSULATION RESISTANCE: 1,000 M ohm min.

ELECTRICAL LIFE: 150,000 cycles at:  
20 AMPS @ 250 V AC.



TERMINAL SCREWS: Torque 4 in/lbs max.

UPC: 010151547019  
HTS: 8536.50.9065  
COO: CN  
RoHS: CERTIFIED

OPERATING TEMPERATURE:  
-67°F to 302°F  
(-55°C to 150°C)..

