
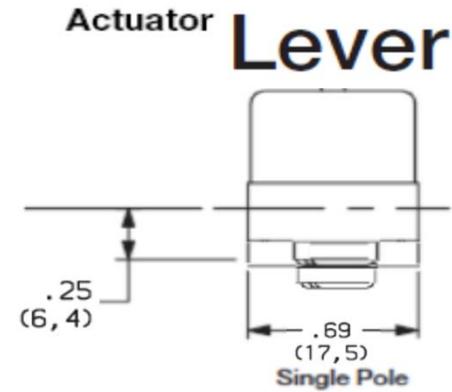


Standard Precision Snap-acting Switch 20A Lever

35-3916

RoHS: CERTIFIED

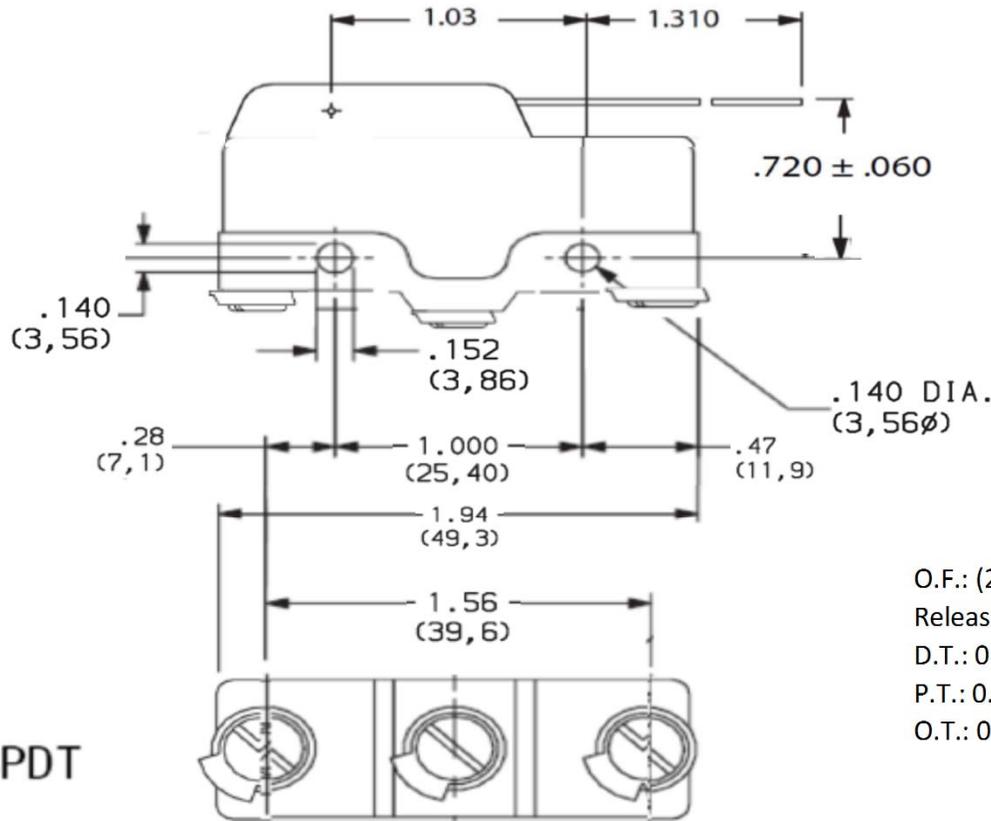

- O.F.: (2.5 - 18) oz. (71 - 510) gm
- Release F.: 0.5 oz. (14 gm)
- D.T.: 0.078" (1.98 mm)
- P.T.: 0.38" (9.7 mm)
- O.T.: 0.19" (4.8 mm)

SPDT

Terminations
Step base, cup washers, 6-32 screws

Electrical Rating
20 A, 125, 250, 480 V AC; 0.25 A,
250 V DC; 0.5 A, 125 V DC; 3/4 HP,
125 V AC; 1 1/2 HP, 250 V AC

Contact Separation": 0.020"

UPC: 010151547040
HTS: 8536.50.9065
COO: CN



INSULATION RESISTANCE: 1,000 M ohm min.
DIELECTRIC STRENGTH: 1,500 Vrms min. @ sea level.
OPERATING TEMPERATURE: -67°F to 302°F (-55°C to 150°C).

