


SNAP ACTION GENERAL PURPOSE

SPDT

35-3922

Hinged Roller

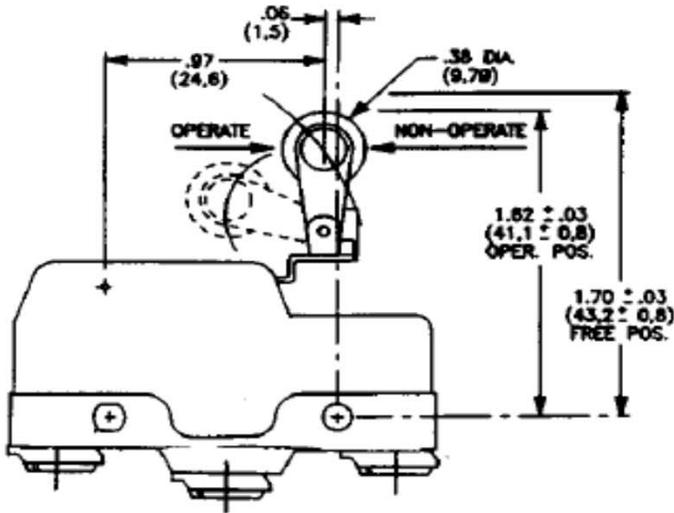

Electrical Rating

20 A, 125, 250, 480 Vac
0.25 A, 250 Vdc; 0.5 A, 125 Vdc
0.5 HP, 125 Vac; 1 HP, 250 Vac

Specifications:

Initial Contact Resistance: 25 Milliohms (max.) @ 6V DC
Insulation Resistance: 1000 Megohms (min.)
Dielectric Strength: 1500V RMS
Contact Material: Silver
Terminal Material: Copper - Silver plate
Temperature Rating: -55°C to 150°C
Electrical Life: 150,000 cycles
Mechanical Life: 10,000,000 cycles typical

UPC: 010151547071
HTS: 8536.50.9065
COO: CR
RoHS: CERTIFIED

O.F. = 18 oz. (510 gm)
D.T. = .020"
P.T. = N/A
O.T = 0.094"



GC Electronics | www.gcelectronics.com | PH: (833) 423-0432 | 3100 N.W. 36th Street, Miami, Florida 33142