


# Miniature Snap-acting Switch

RoHS: CERTIFIED


# 35-3932

Pin plunger

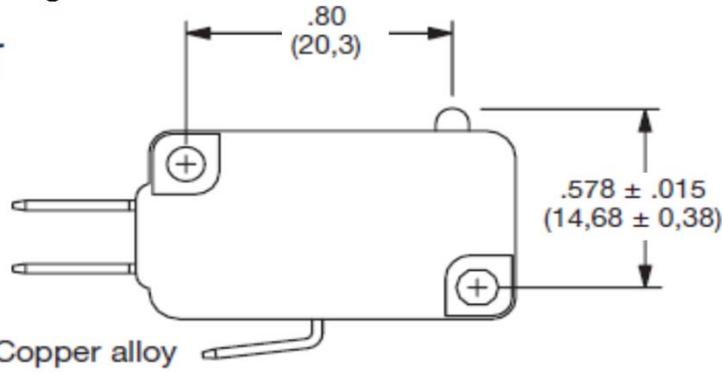

Copper alloy  
Terminations

(STD.) .187" quick connect

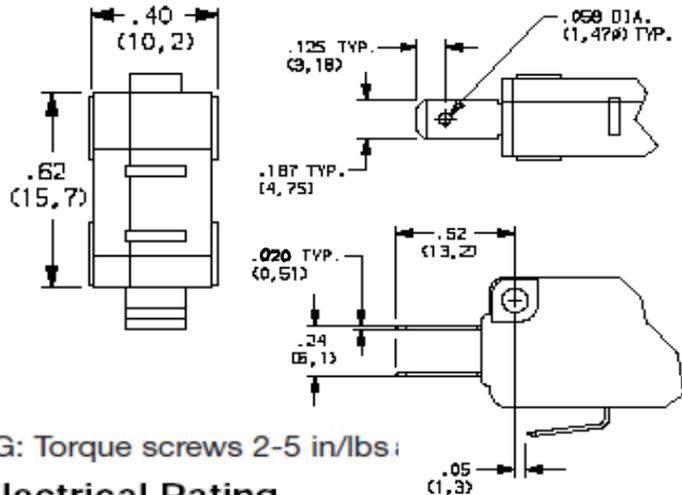


MOUNTING: Torque screws 2-5 in/lbs:

## Electrical Rating

- 21 A, 277 V AC
- 5 A, 125 V AC "L"
- 1 HP, 125 V AC
- 2 HP, 250 V AC

- O. F.: 35-3932 = 7.94 oz. / 225 gm
- 35-3932-1-BU = 5.29 oz. / 150 gm
- Release F.: 1.98 oz. (56 gm)
- D.T.: 0.010" (0.25mm)
- P.T.: 0.047" (1.19mm)
- O.T.: 0.050" (1.27mm)

- INSULATION RESISTANCE: 1,000 M ohm min.
- DIELECTRIC STRENGTH: 1,500 Vrms min. @ sea level.
- OPERATING TEMPERATURE: -40°F to 185°F (-40°C to 85°C)

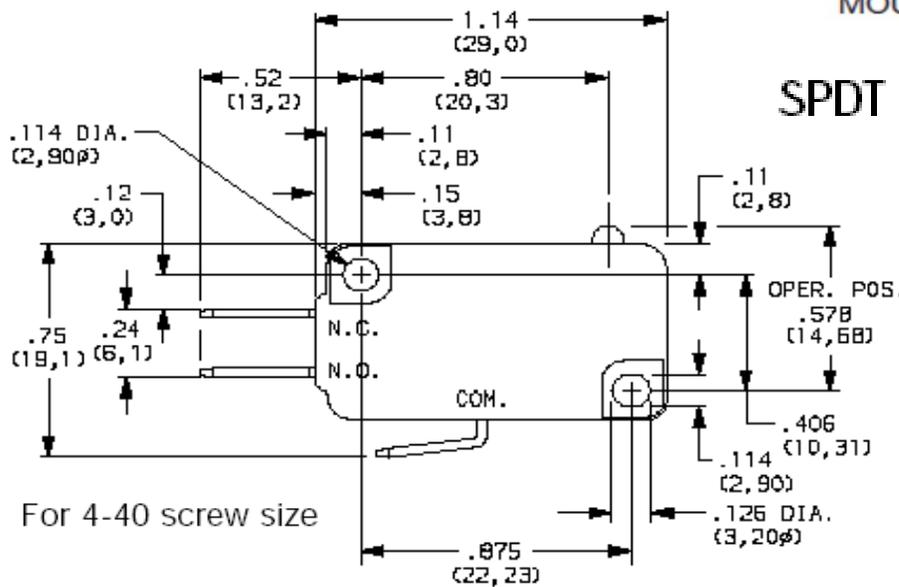

SPDT

For 4-40 screw size

ACTUATOR BUTTON: Thermoplastic (UL 94V-0)

UPC: 010151547095  
HTS: 8536.50.9065  
COO: CN