


Snap Action SPDT


0.84" Lever, high force

35-3934

RoHS: CERTIFIED


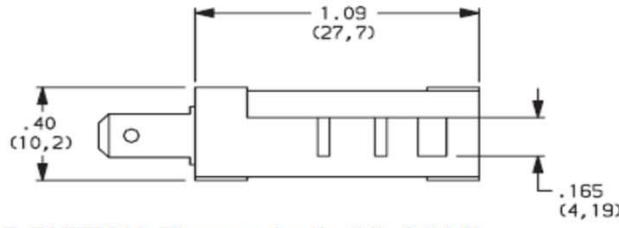


ACTUATOR BUTTON: Thermoplastic (UL 94V-0).

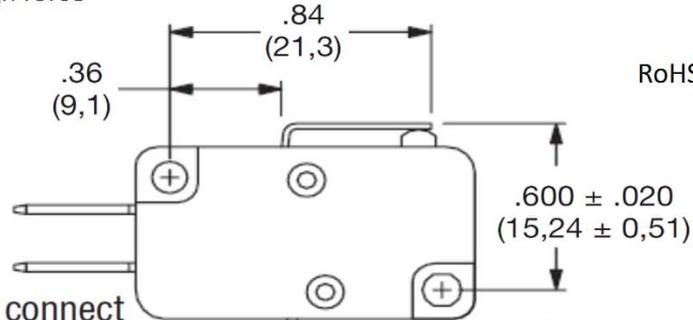

screw size: 4-40.

MOUNTING: Torque screws 2-5 in./lbs.

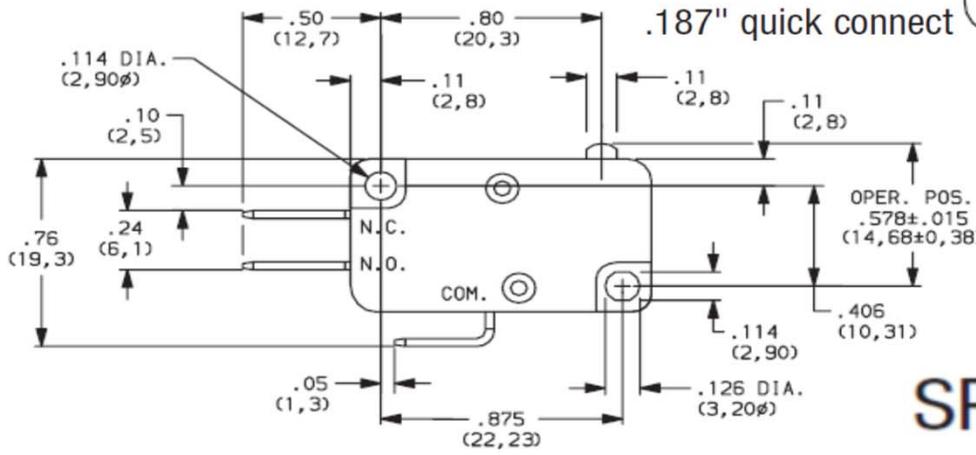

.187" quick connect

- O. F. = (3.17 - 2.65) oz. (90 - 75) gm
- Return F. = 0.53 oz. (15 gm)
- Release F. = 0.99 oz. (28 gm)
- P.T. = 0.080" (2.03mm)
- D.T. = 0.013" (0.33mm)
- O.T. = 0.035" (0.89mm)


SPDT

Electrical Rating

10 A @ 125 & 250 V AC; 1/3 HP @ 125 & 250 V AC; 1/2 A @ 125 V DC; 1/4 A @ 250 V DC



OPERATING TEMPERATURE: -67°F to 302°F (-55°C to 150°C).
 INSULATION RESISTANCE: 1,000 M ohms min.
 DIELECTRIC STRENGTH: 1,000 Vrms min. @ sea level.

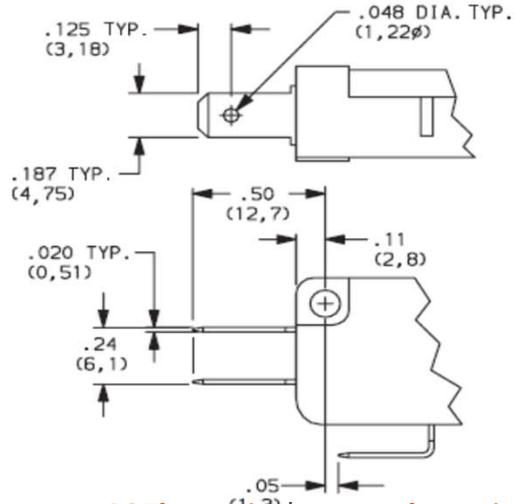

HTS: 8536.50.9065
 UPC: 010151547101 COO: CN

