

Snap Action SPDT Lever 10A Switch

10 A @ 125 & 250 V AC
 1/2 A @ 125 V DC
 1/4 A @ 250 V DC
 1/3 HP @ 125 & 250 V AC

P/N: 35-3942

RoHS: CERTIFIED

O.F. = (1.06 - 1.76) oz.

(30-50) gm


Return F. = 0.11 oz. (3 gm)

Release F. = 0.21 oz. (6 gm)



P.T. = 0.160" (4.06mm)

D.T. = 0.032" (0.81mm)

O.T. = 0.075" (1.9mm)

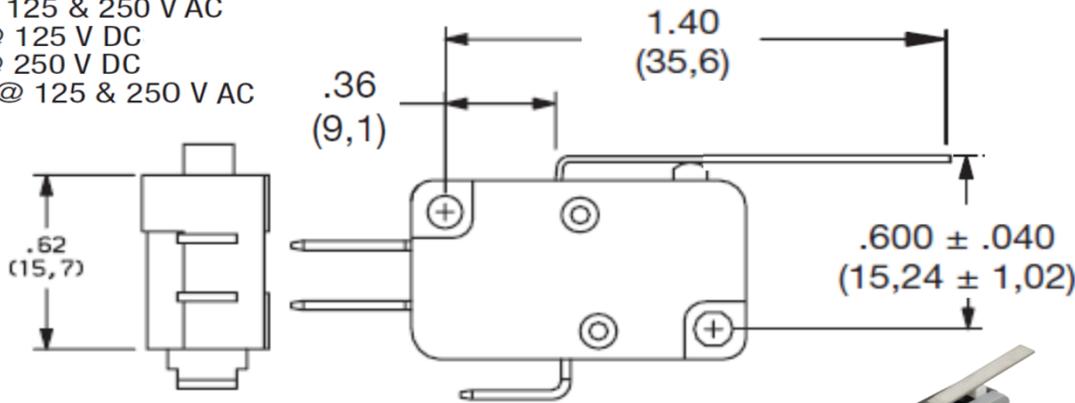

.187" quick connect

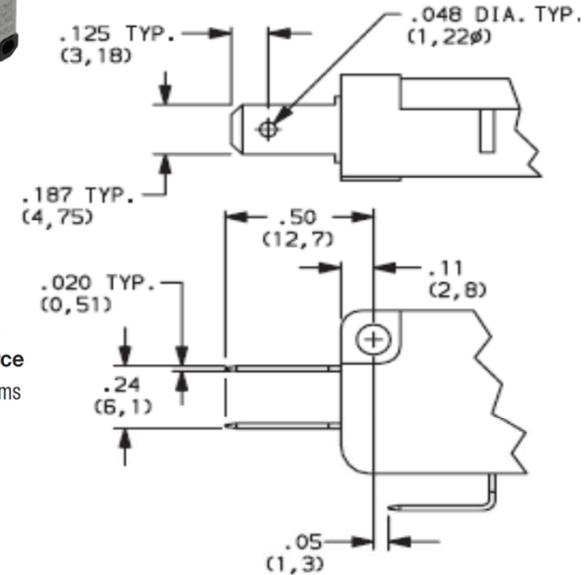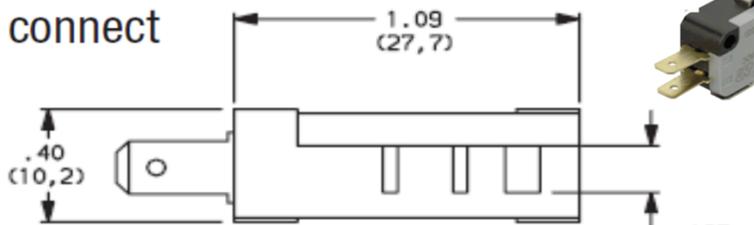


SPDT

screw size: 4-40. MOUNTING: Torque screws 2-5 in/lbs.

ACTUATOR BUTTON: Thermoplastic (UL 94V-0).

Operating Force
 5.29 oz./150 grams

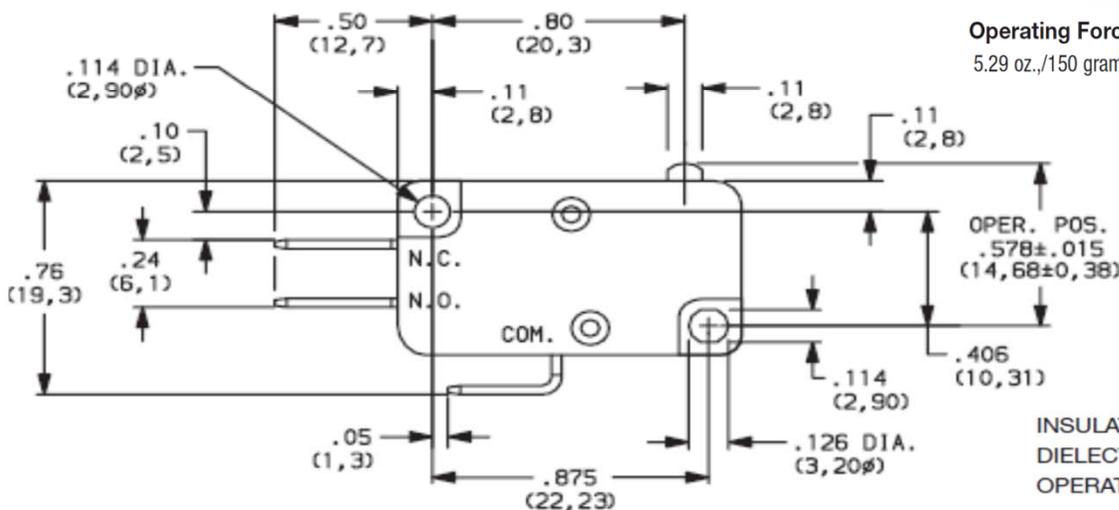

UPC: 010151547149

HTS: 8536.50.9065

COO: CN



INSULATION RESISTANCE: 1,000 M ohms min.
 DIELECTRIC STRENGTH: 1,000 Vrms min. @ sea level.
 OPERATING TEMPERATURE: -67°F to 302°F (-55°C to 150°C).