



Pushbutton Switch

SPST On-(Off)


35-402

Plunger Color
Black

HARDWARE: Nut: Brass, nickel plated

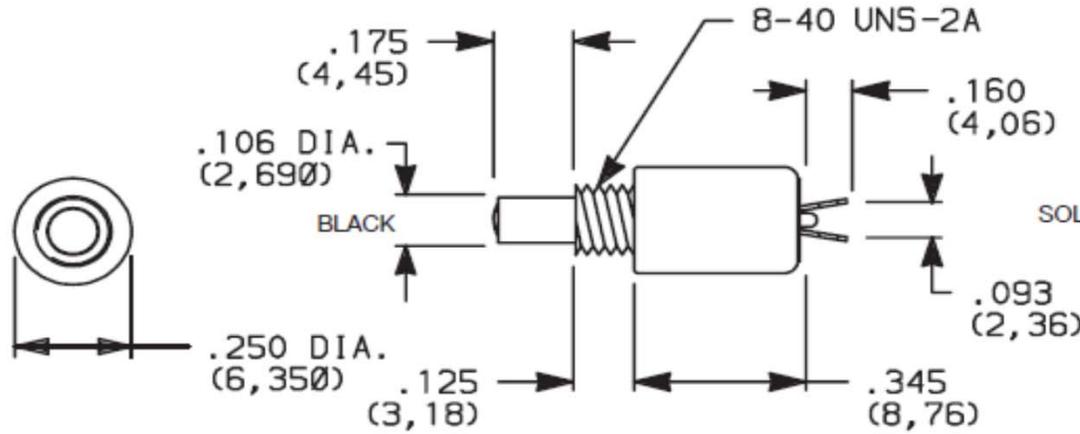

PANEL MOUNTING

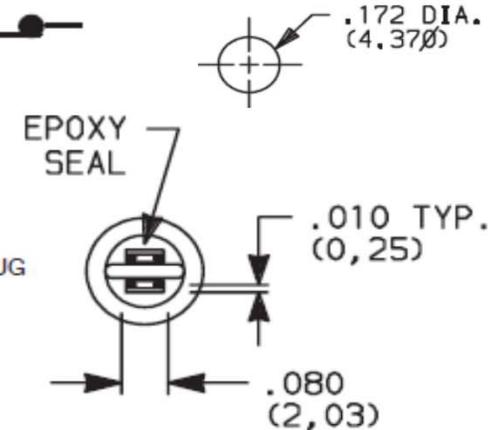


contact material: Coin silver, silver plated

TERMINAL SEAL: Epoxy

- CONTACT RATING:**
 250 mA @ 120 V AC or 28 V DC;
 125 mA @ 250 V AC
- OPERATING TEMPERATURE: -30°C to 65°C.
- INSULATION RESISTANCE: 109 ½ min.
- CONTACT RESISTANCE: Below 30 mΩ typ. initial @2-4 V DC, 100 mA
- ELECTRICAL LIFE: 250,000 actuations at full load
- DIELECTRIC STRENGTH: 500 Vrms min. @ sea level.
- SOLDERABILITY: Per MIL-STD-202F method 208D, or EIA RS-186E method 9.

TOTAL TRAVEL
.048 (1,22) TYP.

ACTUATION FORCE
5 oz (140g) TYP.

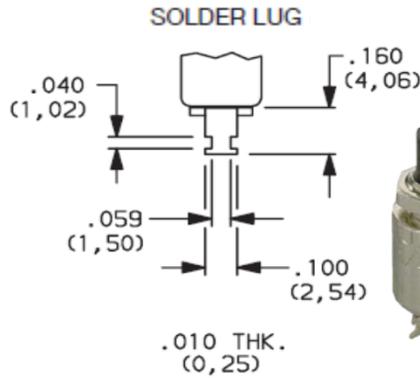

RoHS compliant

