



SPDT

**ACTUATOR BUSHING
LENGTH LENGTH**
0.315 0.335

**MOUNTING
HOLE**
0.250

Specifications:

Initial Contact Resistance: 2.5V DC, 1A, 20 Milliohms or Less

Insulation Resistance: 500V DC, 100 Megohms or More

Dielectric Strength: 1000V AC, 1 Minute

Contact Material: Silver

Terminal Material: Copper Alloy – Silver plated

Country of Origin: Japan



Harmonized Tariff Cd: 8536.50.9065

Mini Push Button Round Plunger Switch

35-404


RoHS: CERTIFIED

Black Cap

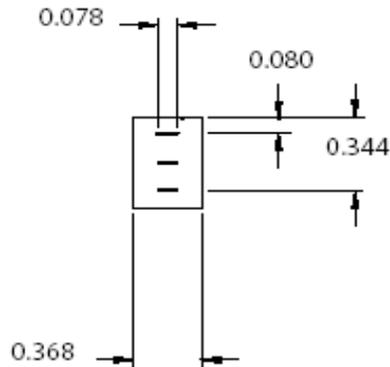

**3 AMPS
125
VAC**

Solder Eyelet

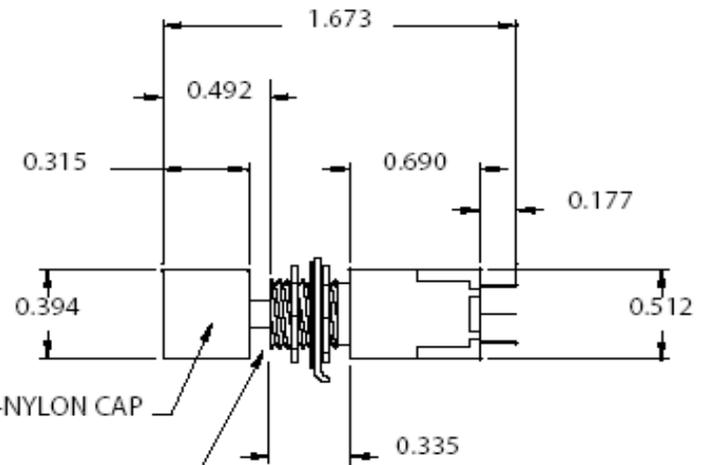

ROUND BLACK 6-NYLON CAP

M6 - 0.750 THD

