





SPST N.O.

(ON) OFF

3  
AMPS  
125  
VAC

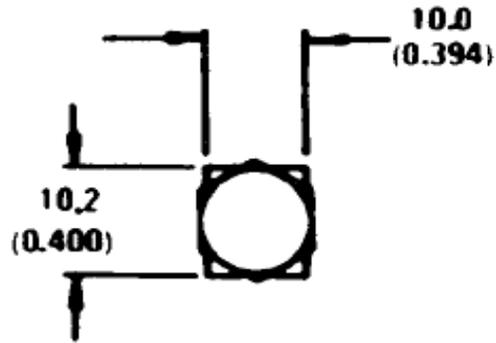


( ) = Momentary  
N.O.= Normally Open



**35-409**

**MINIATURE PUSHBUTTONS**

**# 35-409**

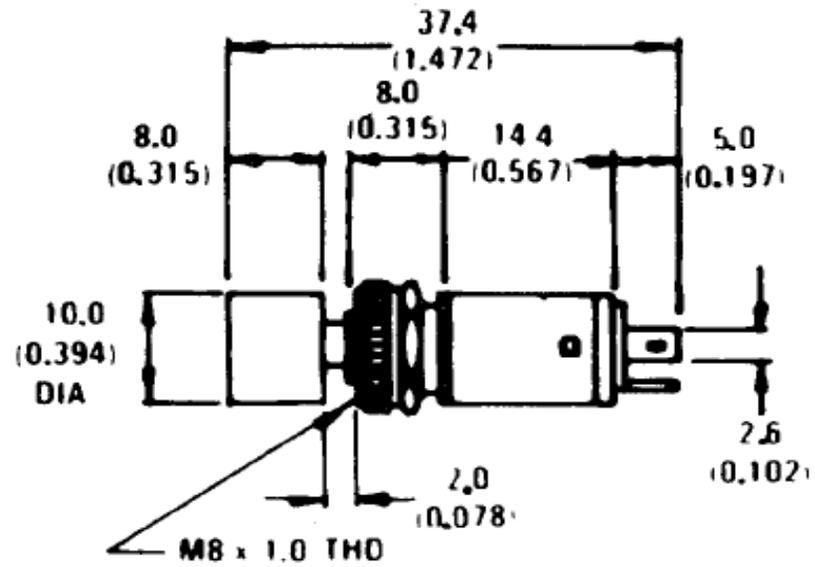

**MOUNTING HOLE** 0.343  
**TERMINAL TYPE** Solder Eyelet

ACTUATOR LENGTH	BUSHING LENGTH	ACTUATOR COLOR
0.315	0.315	Black

**Specifications:**

- Initial Contact Resistance: 2.5V DC @ 1A-20 Milliohms*
- Insulation Resistance: 500V DC, 100 Megohms*
- Dielectric Strength: 1000V DC*
- Contact Material: Silver Plated Copper Alloy*
- Terminal Material: Silver Plated Copper Alloy*

UPC: 010151542588  
HTS: 8536.50.9065  
COO: JP

RoHS: CERTIFIED

