


MINIATURE PUSHBUTTONS - Rectangle Button

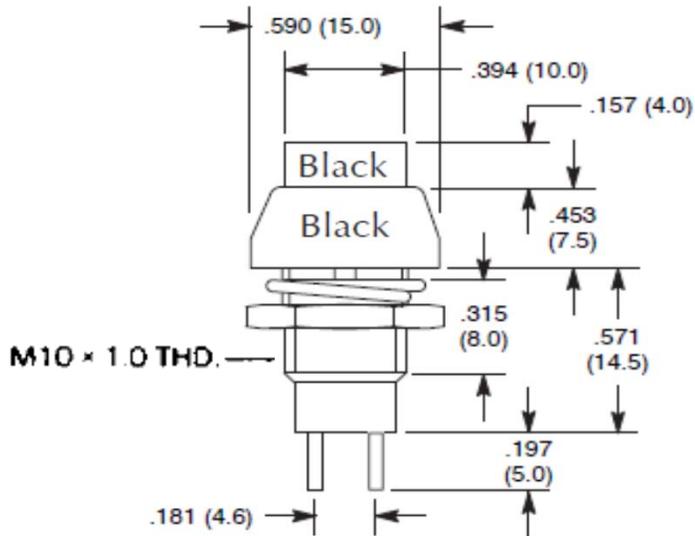

ACTUATOR LENGTH = 0.157"
BUSHING LENGTH = 0.295"

Specifications



Current Rating: 3A 125VAC, 1A 250VAC
Dielectric Strength: 1500V RMS (min.)
Insulation Resistance: 100 Megohms (min.) at 500VDC
Electrical Life: 50,000 cycles
Mechanical Life: 100,000 cycles
Temperature Rating: +15° to +130°F (-10° to +54°C)
Terminal Type: Solder Lug
Mounting Hole: 0.402" (10.2mm)

SPST N.O.
(ON) OFF

35-413

() = Momentary
N.O. = Normally Open
N.C. = Normally Closed

RoHS: CERTIFIED

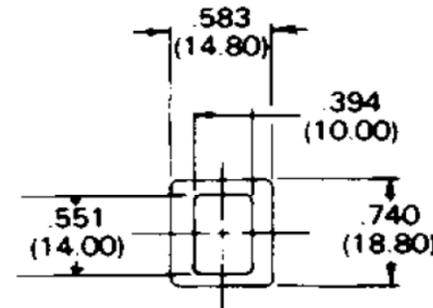

Solder Eyelet

UPC: 010151542663

HTS: 8536.50.9065

CoO: Japan

GC™
ELECTRONICS