


MINIATURE PUSHBUTTONS - Rectangle Button

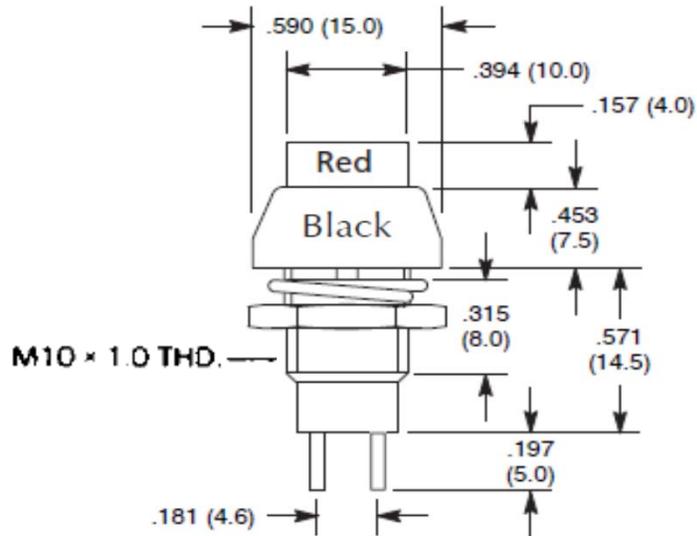

ACTUATOR LENGTH = 0.157"
 BUSHING LENGTH = 0.295"


Specifications

Current Rating: 3A 125VAC, 1A 250VAC
 Dielectric Strength: 1500V RMS (min.)
 Insulation Resistance: 100 Megohms (min.) at 500VDC
 Electrical Life: 50,000 cycles
 Mechanical Life: 100,000 cycles
 Temperature Rating: +15° to +130°F (-10° to +54°C)
 Terminal Type: Solder Lug
 Mounting Hole: 0.402" (10.2mm)


SPST N.O.
 (ON) OFF

35-417

() = Momentary
 N.O. = Normally Open
 N.C. = Normally Closed

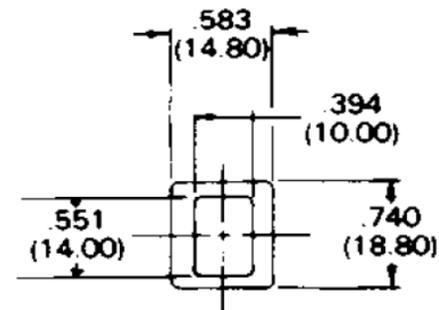

Red Button

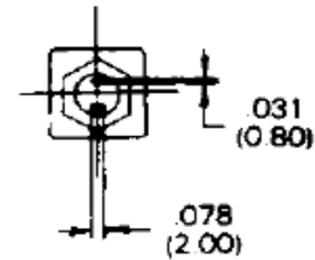

Solder Eyelet

GC™
 ELECTRONICS