



General Purpose Snap-acting Switch

SPDT


35-461

Normally Open & Normally Closed

Pin Plunger (Black)

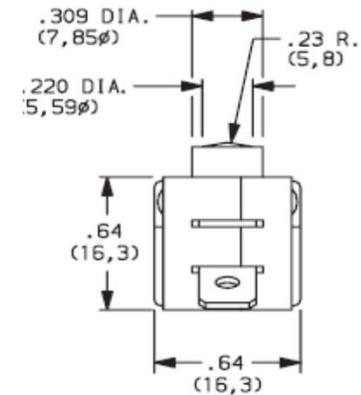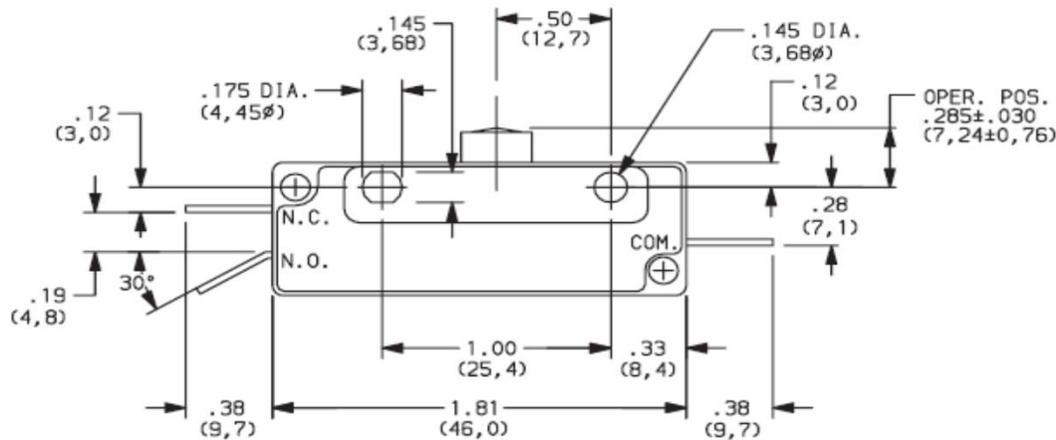

Q.C. (.250")

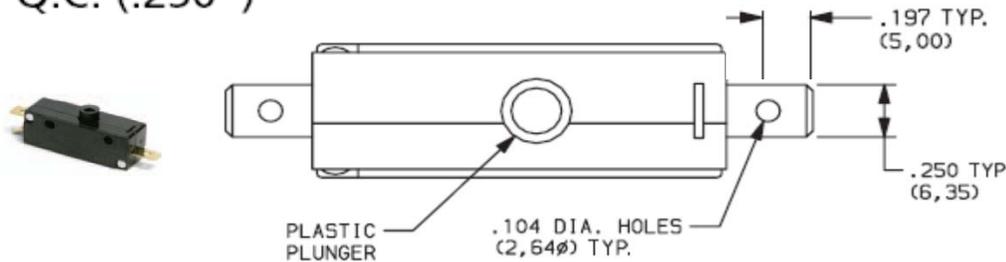

15 A, 125, 250 V AC;
3/4 HP, 125 V AC; 1 1/2 HP, 250 V AC

Mounting holes will accept pins or screws of .139 dia. (3,53) max., on 1.000 (25,40) centers.

ASKHC2P04AC
RoHS CERTIFIED



O.F. = 20 oz. / 567 grams
R. F. = 3 oz. / 85 grams
P. T. = .050" / 1.27mm
O. T. = .050" / 1.27mm

UPC: 010151543233
Harmonized Tariff Cd: 8536.50.9065