


## General Purpose



Lever

SPDT

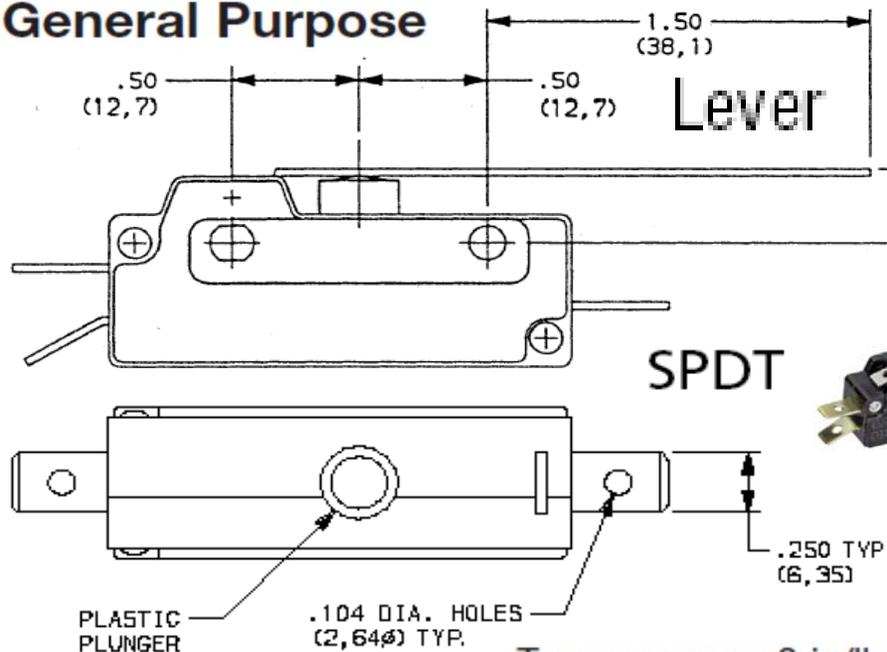

## Snap-acting

.312 ± .062  
(7,92 ± 1,57)

Heat resistant  
phenolic


UL 94V-0

### Electrical Rating

15 A, 125, 250 V AC;  
3/4 HP, 125 V AC; 1 1/2 HP, 250 V AC

# 35-464

RoHS: CERTIFIED

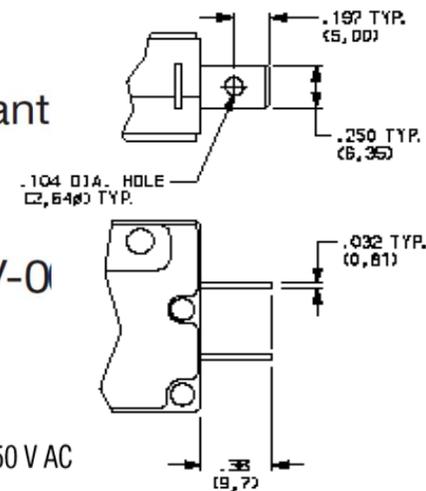

INSULATION RESISTANCE: 1,000 M ohm min.  
DIELECTRIC STRENGTH: 1,000 Vrms min. @ sea level.  
OPERATING TEMPERATURE: -67°F to 185°F (-55°C to 85°C).

Torque screws 3 in/lbs max.

## Operating Force

20 oz./567 grams

Release F.: 0.062 oz.  
1.57 gm

O.P.: 0.312" (7.92mm)


P.T.: 0.312" (7.92mm)

O.T.: 0.187" (4.75mm)


UPC: 010151543295

HTS: 8536.50.9065

CoO: CN

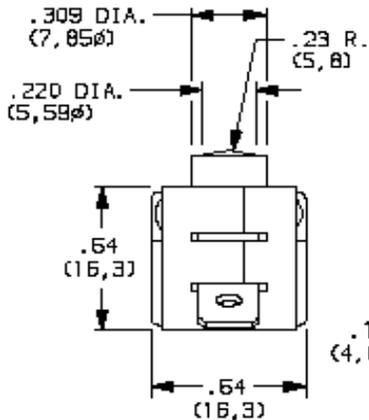

.250" quick connect

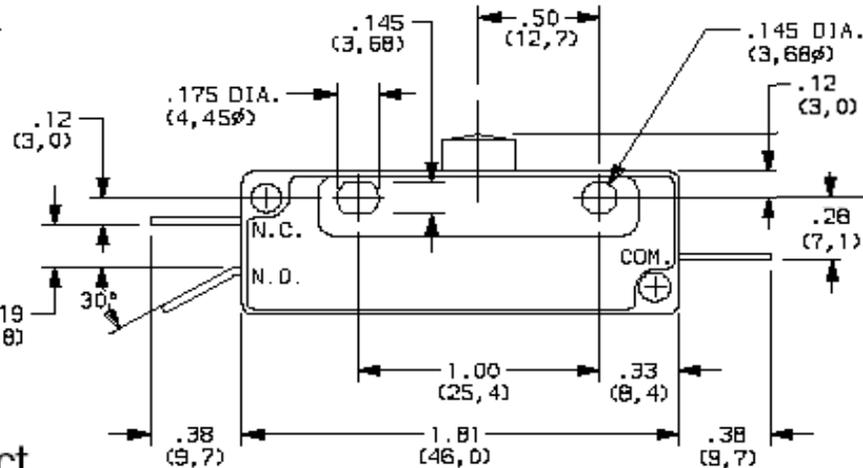

ELECTRICAL LIFE: 200,000 cycles