


Pushbutton / Snap SW

35-473

RoHS: CERTIFIED




Nylon button
w/black nylon
shroud



15' Rated 1/2 H.P. @ 250VDC
AMPS 125/250
VAC

N.O. or N.C.


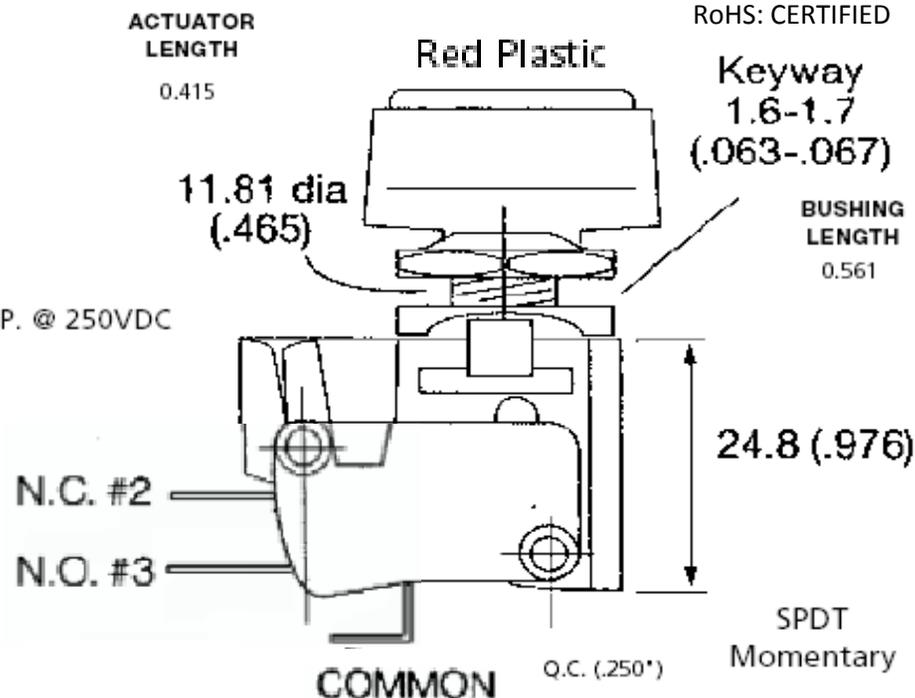


Specifications:

- Initial Contact Resistance:** 10 Milliohms or less
- Insulation Resistance:** 100 Megohms (min.) @ 500 VDC
- Dielectric Strength:** 1650V AC (min.)
- Contact Material:** Silver
- Terminal Material:** Copper – Silver plated
- Mechanical Life:** 1 million operations

Using common terminal, snap-action switch can be wired NO or NC circuits

N.O. = Normally Open
N.C. = Normally Closed

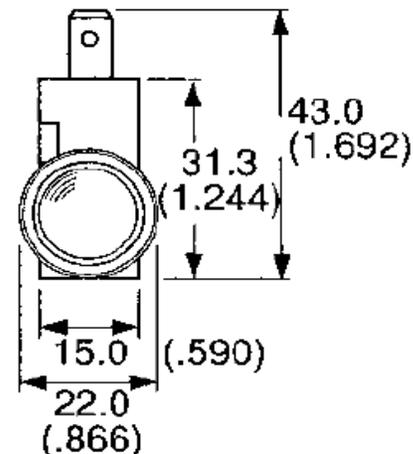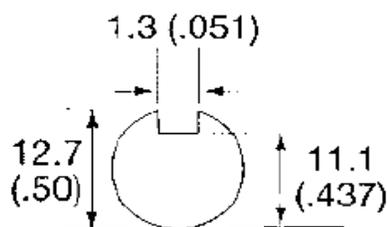

Panel Thickness:
Two nuts 2.5 (.098)
One nut 4.0 (.157)

UPC: 010151559685
HTS: 8536.50.9065
CoO: G.B.

