

# LIGHTED PUSHBUTTONS

## SPST On Off


Single-Pole Single-Throw Normally Open



**35-480**




Contacts: fine silver  
Dielectric strength: 2000 VAC RMS  
Life: 25,000 operations

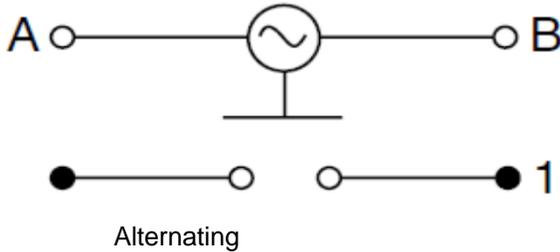

AMPS	AMPS	H.P.	AMPS
120	250	125	14
VAC	VAC	VAC	VOLTS
			DC
10	10	1/4	10

Lamp: 12V Incandescent (Non-replaceable)

RoHS: CERTIFIED Country of Origin: US  
Harmonized Tariff Cd: 8536.50.9065

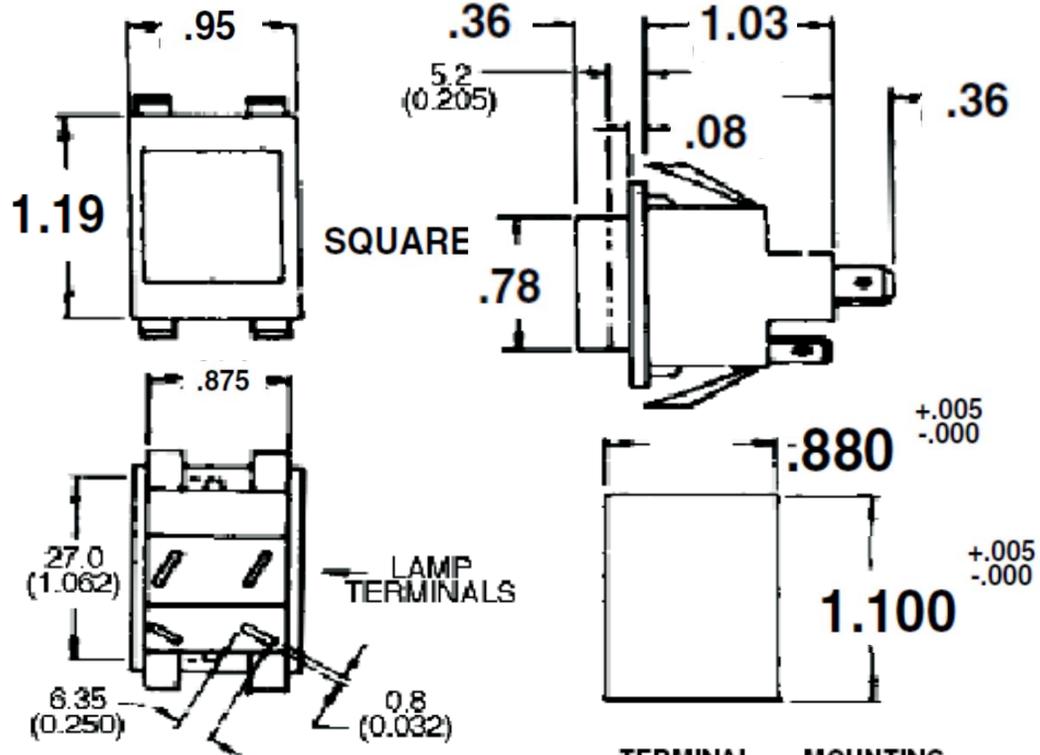

Red Lens	# 35-480
Amber Lens	# 35-482
Green Lens	# 35-484

TERMINAL TYPE	MOUNTING HOLE
Q.C. 1/4", Solder	1.100x.88

